


BKBGDR-RHP

floor duct bend cover with mitre cut and non-slip embossing

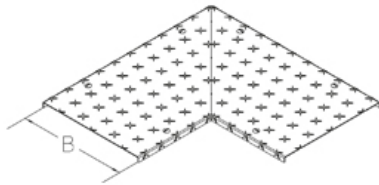

The cover consists of a 2 mm thick galvanized sheet steel with 1 mm non-slip embossing and slip resistance R12 according to DIN 51130. In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	width	t	Pmax	weight	slip resistance class	incl.
BKBGDR-RHP 10S	100 mm	2.00 mm	5 kN	1.27 kg	R12	show all inclusive accessoires	
BKBGDR-RHP 15S	150 mm	2.00 mm	5 kN	1.86 kg	R12	show all inclusive accessoires	
BKBGDR-RHP 20S	200 mm	2.00 mm	5 kN	2.53 kg	R12	show all inclusive accessoires	
BKBGDR-RHP 30S	300 mm	2.00 mm	5 kN	4.10 kg	R12	show all inclusive accessoires	
BKBGDR-RHP 40S	400 mm	2.00 mm	5 kN	5.99 kg	R12	show all inclusive accessoires	
BKBGDR-RHP 50S	500 mm	2.00 mm	5 kN	8.19 kg	R12	show all inclusive accessoires	
BKBGDR-RHP 60S	600 mm	2.00 mm	5 kN	10.70 kg	R12	show all inclusive accessoires	

Product: Product

width: width

t: material thickness


Pmax: Maximum load

weight: weight

slip resistance class: slip resistance according to DIN 51130

incl.: incl.

DETAILS / APPLICATIONS

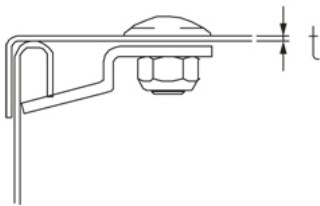



ACCESSORIES

DR-BK, BKDU 100, BKDU 110,

