


BKBGDR-WZB S

floor duct bend cover with aluminium chequered plate and mitre cut

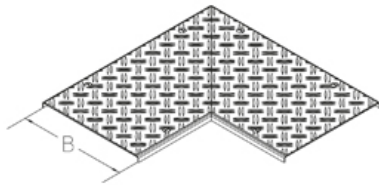

The cover consists of a 2 mm thick galvanized sheet steel with an aluminum sheet support with non-slip embossing and slip resistance R10 according to DIN 51130. In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	width	t	Pmax	weight	slip resistance class	incl.
BKBGDR-WZB 10S	100 mm	2.00 mm	5 kN	1.47 kg	R10	show all inclusive accessoires	
BKBGDR-WZB 15S	150 mm	2.00 mm	5 kN	2.21 kg	R10	show all inclusive accessoires	
BKBGDR-WZB 20S	200 mm	2.00 mm	5 kN	3.05 kg	R10	show all inclusive accessoires	
BKBGDR-WZB 30S	300 mm	2.00 mm	5 kN	5.02 kg	R10	show all inclusive accessoires	
BKBGDR-WZB 40S	400 mm	2.00 mm	5 kN	7.41 kg	R10	show all inclusive accessoires	
BKBGDR-WZB 50S	500 mm	2.00 mm	5 kN	10.19 kg	R10	show all inclusive accessoires	
BKBGDR-WZB 60S	600 mm	2.00 mm	5 kN	13.37 kg	R10	show all inclusive accessoires	

Product: Product

width: width

t: material thickness


Pmax: Maximum load

weight: weight

slip resistance class: slip resistance according to DIN 51130

incl.: incl.

DETAILS / APPLICATIONS





ACCESSORIES

DR-BK, BKDU 100, BKDU 110,

