


## BKBGDR

floor duct bend cover with mitre cut and turning bolts

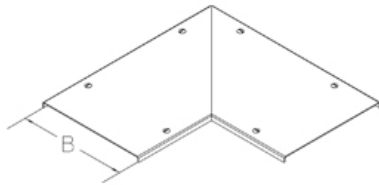

In compliance with the installation specifications and a maximum compartment size of 200 mm, the cover guarantees a tested load capacity of at least 500 kg according to EN 50085-2-2.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул    | Product | width   | t    | Pmax     | weight                         | incl. |
|------------|---------|---------|------|----------|--------------------------------|-------|
| BKBGDR 10S | 100 mm  | 2.00 mm | 5 kN | 1.27 kg  | show all inclusive accessoires |       |
| BKBGDR 15S | 150 mm  | 2.00 mm | 5 kN | 1.86 kg  | show all inclusive accessoires |       |
| BKBGDR 20S | 200 mm  | 2.00 mm | 5 kN | 2.53 kg  | show all inclusive accessoires |       |
| BKBGDR 30S | 300 mm  | 2.00 mm | 5 kN | 4.10 kg  | show all inclusive accessoires |       |
| BKBGDR 40S | 400 mm  | 2.00 mm | 5 kN | 5.99 kg  | show all inclusive accessoires |       |
| BKBGDR 50S | 500 mm  | 2.00 mm | 5 kN | 8.19 kg  | show all inclusive accessoires |       |
| BKBGDR 60S | 600 mm  | 2.00 mm | 5 kN | 10.70 kg | show all inclusive accessoires |       |

**Product:** Product

**width:** width


**t:** material thickness

**Pmax:** Maximum load

**weight:** weight

**incl.:** incl.

## DETAILS / APPLICATIONS





## ACCESSORIES

DR-BK, BKDU 100, BKDU 110,

