


BKBR 100

floor duct bend with radius, height = 100 mm

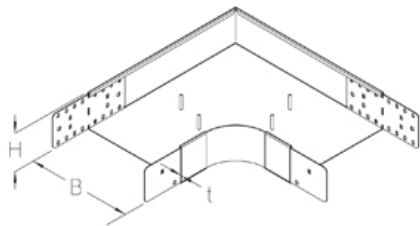

From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKBR 100-10S	100 mm	100 mm	2.00 mm	3.52 kg	show all inclusive accessoires	
BKBR 100-15S	100 mm	150 mm	2.00 mm	4.15 kg	show all inclusive accessoires	
BKBR 100-20S	100 mm	200 mm	2.00 mm	4.87 kg	show all inclusive accessoires	
BKBR 100-30S	100 mm	300 mm	2.00 mm	6.53 kg	show all inclusive accessoires	
BKBR 100-40S	100 mm	400 mm	2.00 mm	8.51 kg	show all inclusive accessoires	
BKBR 100-50S	100 mm	500 mm	2.00 mm	10.80 kg	show all inclusive accessoires	
BKBR 100-60S	100 mm	600 mm	2.00 mm	13.41 kg	show all inclusive accessoires	

Product: Product

height: height


width: width

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

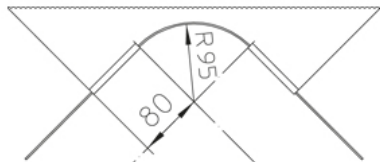



ACCESSORIES

BKBRDR, BKBRDR-RHP, BKBRDR-WZB AL, BKBRDR-WZB S, BKRTV 100, BKDS 100,

