


BKGL 110

floor duct with mitre cut, left, height = 110 mm

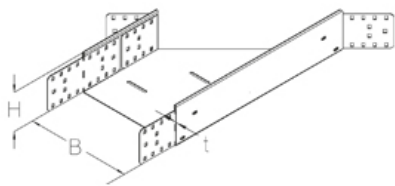

From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKGL 110-10S	110 mm	100 mm	2.00 mm	2.88 kg	show all inclusive accessoires	
BKGL 110-15S	110 mm	150 mm	2.00 mm	3.25 kg	show all inclusive accessoires	
BKGL 110-20S	110 mm	200 mm	2.00 mm	3.66 kg	show all inclusive accessoires	
BKGL 110-30S	110 mm	300 mm	2.00 mm	4.60 kg	show all inclusive accessoires	
BKGL 110-40S	110 mm	400 mm	2.00 mm	5.71 kg	show all inclusive accessoires	
BKGL 110-50S	110 mm	500 mm	2.00 mm	6.99 kg	show all inclusive accessoires	
BKGL 110-60S	110 mm	600 mm	2.00 mm	8.36 kg	show all inclusive accessoires	

Product: Product

height: height


width: width

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

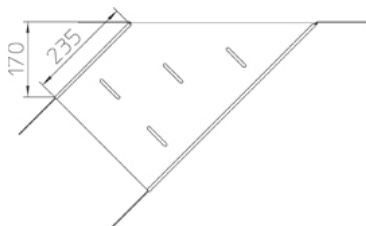



ACCESSORIES

BKGLDR, BKGLDR-RHP, BKGLDR-WZB AL, BKGLDR-WZB S, BKRTV 110, BKDS 110,

