


BKGR 100

floor duct with mitre cut, right, height = 100 mm

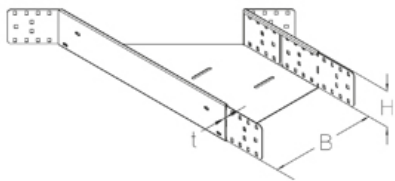

From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKGR 100-10S	100 mm	100 mm	2.00 mm	2.79 kg	show all inclusive accessoires	
BKGR 100-15S	100 mm	150 mm	2.00 mm	3.15 kg	show all inclusive accessoires	
BKGR 100-20S	100 mm	200 mm	2.00 mm	3.56 kg	show all inclusive accessoires	
BKGR 100-30S	100 mm	300 mm	2.00 mm	4.39 kg	show all inclusive accessoires	
BKGR 100-40S	100 mm	400 mm	2.00 mm	5.57 kg	show all inclusive accessoires	
BKGR 100-50S	100 mm	500 mm	2.00 mm	6.84 kg	show all inclusive accessoires	
BKGR 100-60S	100 mm	600 mm	2.00 mm	8.19 kg	show all inclusive accessoires	

Product: Product

height: height


width: width

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

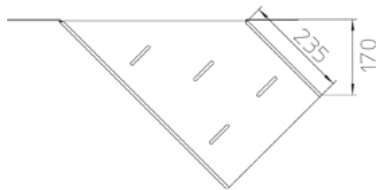



ACCESSORIES

БКGRDR, БКGRDR-RHP, БКGRDR-WZB AL, БКGRDR-WZB S, БКRTV 100, БKDS 100,

