


## BKGR 110

floor duct with mitre cut, right, height = 110 mm

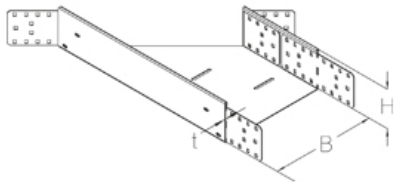

From a width  $\geq 300$  mm, one separating strip must be installed. From a width of  $\geq 500$  mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул      | Product | height | width   | t       | weight                         | incl. |
|--------------|---------|--------|---------|---------|--------------------------------|-------|
| BKGR 110-10S | 110 mm  | 100 mm | 2.00 mm | 2.88 kg | show all inclusive accessoires |       |
| BKGR 110-15S | 110 mm  | 150 mm | 2.00 mm | 3.25 kg | show all inclusive accessoires |       |
| BKGR 110-20S | 110 mm  | 200 mm | 2.00 mm | 3.66 kg | show all inclusive accessoires |       |
| BKGR 110-30S | 110 mm  | 300 mm | 2.00 mm | 4.60 kg | show all inclusive accessoires |       |
| BKGR 110-40S | 110 mm  | 400 mm | 2.00 mm | 5.71 kg | show all inclusive accessoires |       |
| BKGR 110-50S | 110 mm  | 500 mm | 2.00 mm | 6.99 kg | show all inclusive accessoires |       |
| BKGR 110-60S | 110 mm  | 600 mm | 2.00 mm | 8.36 kg | show all inclusive accessoires |       |

**Product:** Product

**height:** height


**width:** width

**t:** material thickness

**weight:** weight

**incl.:** incl.

## DETAILS / APPLICATIONS

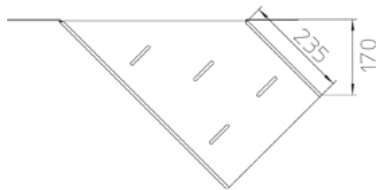



## ACCESSORIES

BKGRDR, BKGRDR-RHP, BKGRDR-WZB AL, BKGRDR-WZB S, BKRTV 110, BKDS 110,

