


BKK 100

floor duct crossing, height = 100 mm



floor duct crossing for horizontal change of direction with integrated connectors

From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKK 100-10S	100 mm	100 mm	2.00 mm	3.20 kg	show all inclusive accessoires	
BKK 100-15S	100 mm	150 mm	2.00 mm	3.58 kg	show all inclusive accessoires	
BKK 100-20S	100 mm	200 mm	2.00 mm	4.04 kg	show all inclusive accessoires	
BKK 100-30S	100 mm	300 mm	2.00 mm	5.11 kg	show all inclusive accessoires	
BKK 100-40S	100 mm	400 mm	2.00 mm	6.57 kg	show all inclusive accessoires	
BKK 100-50S	100 mm	500 mm	2.00 mm	8.33 kg	show all inclusive accessoires	
BKK 100-60S	100 mm	600 mm	2.00 mm	10.42 kg	show all inclusive accessoires	

Product: Product

height: height


width: width

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

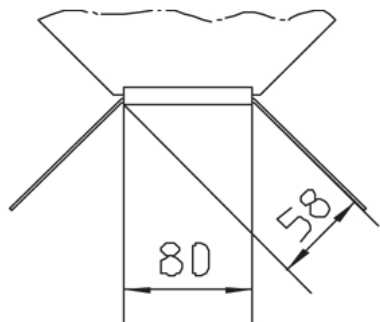



ACCESSORIES

BKKDR, BKKDR-RHP, BKKDR-WZB AL, BKKDR-WZB S, BKRTV 100, BKDS 100,



UL classified

