


BKK 110

floor duct crossing, height = 110 mm



floor duct crossing for horizontal change of direction with integrated connectors

From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKK 110-10S	110 mm	100 mm	2.00 mm	3.60 kg	show all inclusive accessoires	
BKK 110-15S	110 mm	150 mm	2.00 mm	3.87 kg	show all inclusive accessoires	
BKK 110-20S	110 mm	200 mm	2.00 mm	4.44 kg	show all inclusive accessoires	
BKK 110-30S	110 mm	300 mm	2.00 mm	5.51 kg	show all inclusive accessoires	
BKK 110-40S	110 mm	400 mm	2.00 mm	6.97 kg	show all inclusive accessoires	
BKK 110-50S	110 mm	500 mm	2.00 mm	8.73 kg	show all inclusive accessoires	
BKK 110-60S	110 mm	600 mm	2.00 mm	10.82 kg	show all inclusive accessoires	

Product: Product

height: height


width: width

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

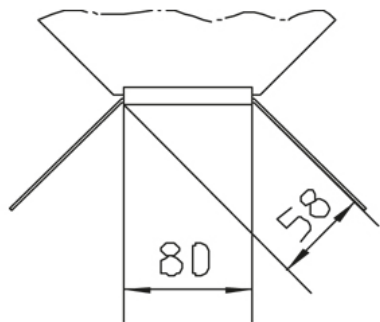



ACCESSORIES

BKKDR, BKKDR-RHP, BKKDR-WZB AL, BKKDR-WZB S, BKRTV 110, BKDS 110,

