


BKVB 100

floor duct bend, variable, height = 100 mm



From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKVB 100-10S	100 mm	100 mm	2.00 mm	1.41 kg	show all inclusive accessoires	
BKVB 100-15S	100 mm	150 mm	2.00 mm	1.86 kg	show all inclusive accessoires	
BKVB 100-20S	100 mm	200 mm	2.00 mm	2.37 kg	show all inclusive accessoires	
BKVB 100-30S	100 mm	300 mm	2.00 mm	3.51 kg	show all inclusive accessoires	
BKVB 100-40S	100 mm	400 mm	2.00 mm	4.91 kg	show all inclusive accessoires	
BKVB 100-50S	100 mm	500 mm	2.00 mm	6.55 kg	show all inclusive accessoires	
BKVB 100-60S	100 mm	600 mm	2.00 mm	8.42 kg	show all inclusive accessoires	

Product: Product

height: height


width: width

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

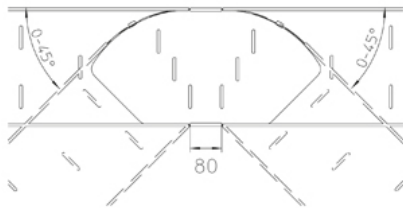



ACCESSORIES

BKVBDR, BKVBDR-RHP, BKVBDR-WZB AL, BKVBDR-WZB S, BKRTV 100, BKDS 100,

