


BKVB 110

floor duct bend, variable, height = 110 mm




From a width ≥ 300 mm, one separating strip must be installed. From a width of ≥ 500 mm, two separating strips must be installed.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	t	weight	incl.
BKVB 110-10S	110 mm	100 mm	2.00 mm	1.50 kg	show all inclusive accessoires	
BKVB 110-15S	110 mm	150 mm	2.00 mm	1.96 kg	show all inclusive accessoires	
BKVB 110-20S	110 mm	200 mm	2.00 mm	2.47 kg	show all inclusive accessoires	
BKVB 110-30S	110 mm	300 mm	2.00 mm	3.63 kg	show all inclusive accessoires	
BKVB 110-40S	110 mm	400 mm	2.00 mm	5.05 kg	show all inclusive accessoires	
BKVB 110-50S	110 mm	500 mm	2.00 mm	6.71 kg	show all inclusive accessoires	
BKVB 110-60S	110 mm	600 mm	2.00 mm	8.60 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
t: material thickness
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

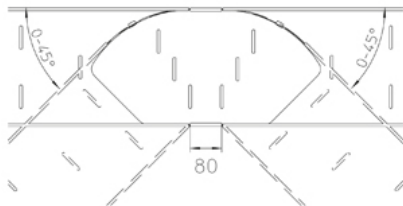



ACCESSORIES

BKVBDR, BKVBDR-RHP, BKVBDR-WZB AL, BKVBDR-WZB S, BKRTV 110, BKDS 110,

