


SRM

clamp socket

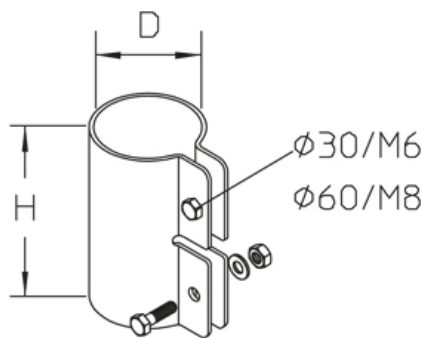

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	diameter	t	weight
SRM 30F	80 mm	30 mm	1.50 mm	0.15 kg	
SRM 60F	115 mm	60 mm	2.50 mm	0.55 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	diameter	t	weight
SRM 30E	80 mm	30 mm	1.50 mm	0.15 kg	
SRM 60E	115 mm	60 mm	2.50 mm	0.55 kg	

Product: Product
height: height
diameter: diameter
t: material thickness
weight: weight

DETAILS / APPLICATIONS

