


SRML

elongated slot socket

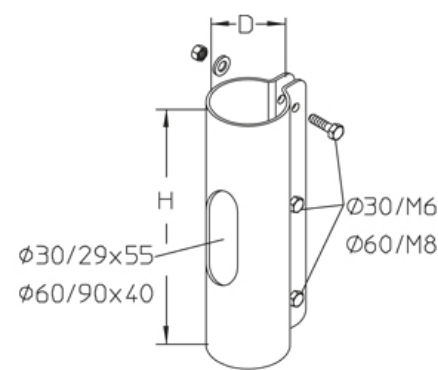

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	diameter	t	weight
SRML 30F	130 mm	30 mm	1.50 mm	0.20 kg	
SRML 60F	230 mm	60 mm	2.50 mm	1.05 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	diameter	t	weight
SRML 30E	130 mm	30 mm	1.50 mm	0.20 kg	
SRML 60E	230 mm	60 mm	2.50 mm	1.05 kg	

Product: Product
height: height
diameter: diameter
t: material thickness
weight: weight

DETAILS / APPLICATIONS

