


SRS-R

tube clamp

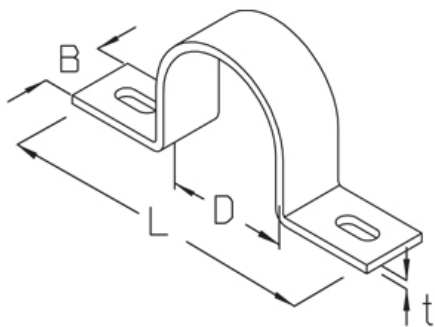

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	diameter	t	weight
SRS-R 30F	25 mm	85 mm	31 mm	2.50 mm	0.06 kg	
SRS-R 60F	30 mm	160 mm	61 mm	4.00 mm	0.22 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	length	diameter	t	weight
SRS-R 30E	25 mm	85 mm	31 mm	2.50 mm	0.06 kg	
SRS-R 60E	30 mm	160 mm	61 mm	4.00 mm	0.22 kg	

Product: Product

width: width

length: length

diameter: diameter

t: material thickness

weight: weight

DETAILS / APPLICATIONS



9x20

