


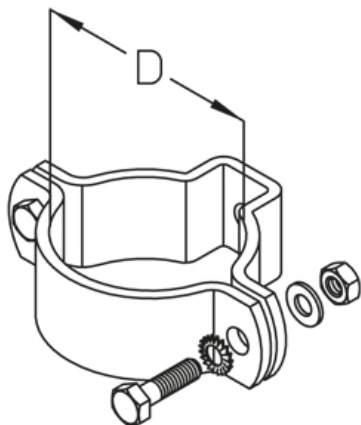

## SRS-W

dual fastening clamp

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул   | Product | diameter | t       | weight |
|-----------|---------|----------|---------|--------|
| SRS-W 30F | 31 mm   | 4.00 mm  | 0.21 kg |        |
| SRS-W 60F | 61 mm   | 4.00 mm  | 0.31 kg |        |

Stainless steel, according to ASTM 304 / BS 304 S 3

| Артикул   | Product | diameter | t       | weight |
|-----------|---------|----------|---------|--------|
| SRS-W 30E | 31 mm   | 4.00 mm  | 0.21 kg |        |
| SRS-W 60E | 61 mm   | 4.00 mm  | 0.31 kg |        |

**Product:** Product  
**diameter:** diameter  
**t:** material thickness  
**weight:** weight

## DETAILS / APPLICATIONS

