


GBH 30

spacer bar for mesh tray detent dimension 30

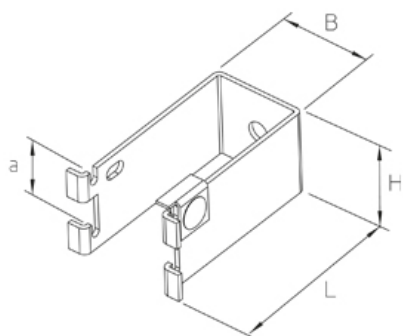

Spacer bar for horizontal wall mounting of mesh cable trays. Suitable for mounting on the lateral longitudinal wires of the mesh cable trays G 50 and G 100 up to a width of 116 mm and the GI up to a width of 76 mm (fig. a). Spacer bar for horizontal-vertical wall fastening of mesh cable trays. Suitable for mounting on the longitudinal wires in the bottom of the mesh cable trays G 50 and G 100 up to a width of 216 mm and the GI up to a width of 136 mm (fig. b). From a width of 216 mm, two spacer bars are required for mounting the G 50, G 100 and GI.

The support distance is to be chosen according to the local conditions, maximum 1 m.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	a	weight	incl.
GBH 30S	45 mm	50 mm	100 mm	30 mm	0.27 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	a	weight	incl.
GBH 30F	45 mm	50 mm	100 mm	30 mm	0.25 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	a	weight	incl.
GBH 30E	45 mm	50 mm	100 mm	30 mm	0.27 kg	show all inclusive accessoires	

Product: Product**height:** height**width:** width**length:** length**a:** wire distance**weight:** weight**incl.:** incl.

DETAILS / APPLICATIONS

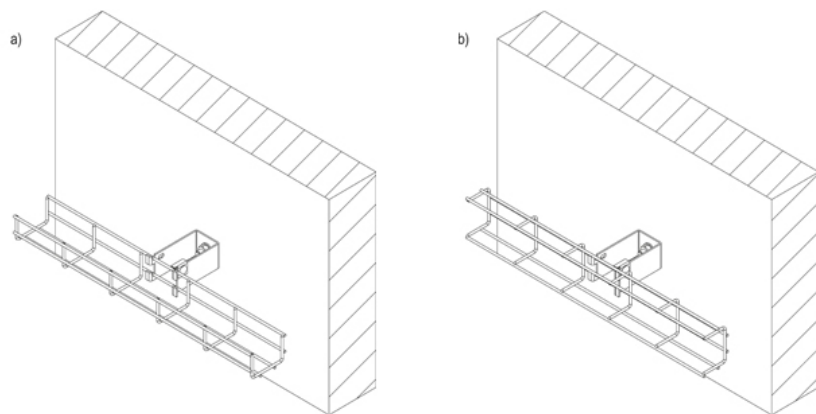

ACCESSORIES

GBH SL,

