


G 100

mesh cable tray, U-shape, height = 103 mm



Mesh cable tray, U-shape, certified including electrical conductivity according to DIN EN 61537/VDE 0639.

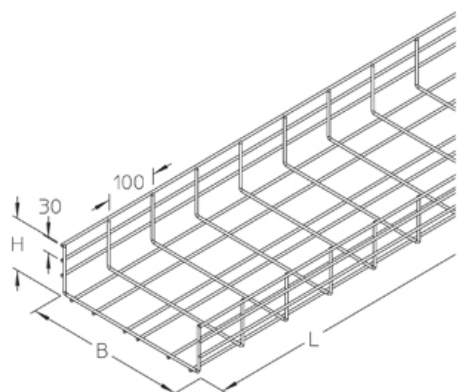

galvanized, according to ISO 4042

Артикул	Product	height	width	length	t	A	QSK	weight
G 100-10GV	103 mm	116 mm	3000 mm	4.00 mm	95 cm ²	0.14 kN/m	3.28 kg	
G 100-20GV	103 mm	216 mm	3000 mm	4.00 mm	190 cm ²	0.29 kN/m	4.18 kg	
G 100-30GV	103 mm	318 mm	3000 mm	4.50 mm	282 cm ²	0.42 kN/m	6.42 kg	
G 100-40GV	103 mm	418 mm	3000 mm	4.50 mm	376 cm ²	0.56 kN/m	7.56 kg	
G 100-50GV	103 mm	518 mm	3000 mm	4.50 mm	470 cm ²	0.71 kN/m	8.70 kg	
G 100-60GV	103 mm	618 mm	3000 mm	4.50 mm	564 cm ²	0.85 kN/m	9.84 kg	

Pre-galvanised (DIN EN 10244-2)

Артикул	Product	height	width	length	t	A	QSK	weight
G 100-10S	103 mm	116 mm	3000 mm	4.00 mm	95 cm ²	0.14 kN/m	3.28 kg	
G 100-20S	103 mm	216 mm	3000 mm	4.00 mm	190 cm ²	0.29 kN/m	4.18 kg	
G 100-30S	103 mm	318 mm	3000 mm	4.50 mm	282 cm ²	0.42 kN/m	6.42 kg	
G 100-40S	103 mm	418 mm	3000 mm	4.50 mm	376 cm ²	0.56 kN/m	7.56 kg	
G 100-50S	103 mm	518 mm	3000 mm	4.50 mm	470 cm ²	0.71 kN/m	8.70 kg	
G 100-60S	103 mm	618 mm	3000 mm	4.50 mm	564 cm ²	0.85 kN/m	9.84 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	A	QSK	weight
G 100-10F	103 mm	116 mm	3000 mm	4.00 mm	95 cm ²	0.14 kN/m	3.51 kg	
G 100-20F	103 mm	216 mm	3000 mm	4.00 mm	190 cm ²	0.29 kN/m	4.48 kg	
G 100-30F	103 mm	318 mm	3000 mm	4.50 mm	282 cm ²	0.42 kN/m	6.87 kg	
G 100-40F	103 mm	418 mm	3000 mm	4.50 mm	376 cm ²	0.56 kN/m	8.09 kg	
G 100-50F	103 mm	518 mm	3000 mm	4.50 mm	470 cm ²	0.71 kN/m	9.31 kg	
G 100-60F	103 mm	618 mm	3000 mm	4.50 mm	564 cm ²	0.85 kN/m	10.53 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	A	QSK	weight
G 100-10E	103 mm	116 mm	3000 mm	4.00 mm	95 cm ²	0.14 kN/m	3.28 kg	
G 100-20E	103 mm	216 mm	3000 mm	4.00 mm	190 cm ²	0.29 kN/m	4.18 kg	
G 100-30E	103 mm	318 mm	3000 mm	4.50 mm	282 cm ²	0.42 kN/m	6.47 kg	
G 100-40E	103 mm	418 mm	3000 mm	4.50 mm	376 cm ²	0.56 kN/m	7.62 kg	
G 100-50E	103 mm	518 mm	3000 mm	4.50 mm	470 cm ²	0.71 kN/m	8.77 kg	
G 100-60E	103 mm	618 mm	3000 mm	4.50 mm	564 cm ²	0.85 kN/m	9.92 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	t	A	QSK	weight
G 100-10E4	103 mm	116 mm	3000 mm	4.00 mm	95 cm ²	0.14 kN/m	3.35 kg	
G 100-20E4	103 mm	216 mm	3000 mm	4.00 mm	190 cm ²	0.29 kN/m	4.27 kg	
G 100-30E4	103 mm	318 mm	3000 mm	4.50 mm	282 cm ²	0.42 kN/m	6.53 kg	
G 100-40E4	103 mm	418 mm	3000 mm	4.50 mm	376 cm ²	0.56 kN/m	7.68 kg	
G 100-50E4	103 mm	518 mm	3000 mm	4.50 mm	470 cm ²	0.71 kN/m	8.84 kg	
G 100-60E4	103 mm	618 mm	3000 mm	4.50 mm	564 cm ²	0.85 kN/m	10.00 kg	

Product: Product

height: height

width: width

length: length


t: material thickness

A: cross section area



QSK: distributed load control cable

weight: weight

LOAD DIAGRAM

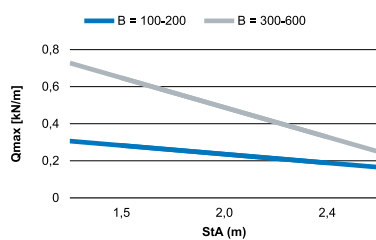

DETAILS / APPLICATIONS

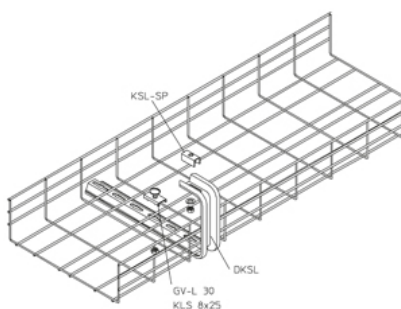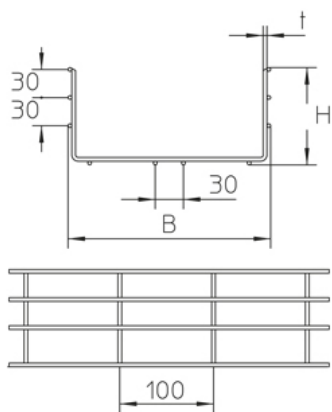

ACCESSORIES

MP-G, GVR, GV 30, GVD 30, GV-L 30, GVU, GVK, GTR 100, GKAB, KLU,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

