


GI

mesh cable tray, C-shape, height = 75 mm



Mesh cable tray, C-shape, heavy-duty, certified including electrical conductivity according to DIN EN 61537/VDE 0639.

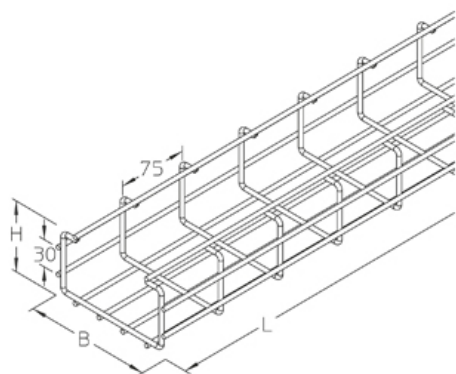

galvanized, according to ISO 4042

Артикул	Product	height	width	length	t	A	QSK	weight
GI 06GV	75 mm	76 mm	3000 mm	4.50 mm	33 cm ²	0.05 kN/m	4.10 kg	
GI 12GV	75 mm	136 mm	3000 mm	4.50 mm	67 cm ²	0.10 kN/m	5.16 kg	
GI 20GV	75 mm	216 mm	3000 mm	4.50 mm	113 cm ²	0.17 kN/m	5.57 kg	
GI 30GV	75 mm	316 mm	3000 mm	4.50 mm	165 cm ²	0.25 kN/m	6.83 kg	

Pre-galvanised (DIN EN 10244-2)

Артикул	Product	height	width	length	t	A	QSK	weight
GI 06S	75 mm	76 mm	3000 mm	4.50 mm	33 cm ²	0.05 kN/m	4.10 kg	
GI 12S	75 mm	136 mm	3000 mm	4.50 mm	67 cm ²	0.10 kN/m	5.16 kg	
GI 20S	75 mm	216 mm	3000 mm	4.50 mm	113 cm ²	0.17 kN/m	5.57 kg	
GI 30S	75 mm	316 mm	3000 mm	4.50 mm	165 cm ²	0.25 kN/m	6.83 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	A	QSK	weight
GI 06F	75 mm	76 mm	3000 mm	4.50 mm	33 cm ²	0.05 kN/m	4.39 kg	
GI 12F	75 mm	136 mm	3000 mm	4.50 mm	67 cm ²	0.10 kN/m	5.52 kg	
GI 20F	75 mm	216 mm	3000 mm	4.50 mm	113 cm ²	0.17 kN/m	5.96 kg	
GI 30F	75 mm	316 mm	3000 mm	4.50 mm	165 cm ²	0.25 kN/m	7.31 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	A	QSK	weight
GI 06E	75 mm	76 mm	3000 mm	4.50 mm	33 cm ²	0.05 kN/m	4.12 kg	
GI 12E	75 mm	136 mm	3000 mm	4.50 mm	67 cm ²	0.10 kN/m	5.19 kg	
GI 20E	75 mm	216 mm	3000 mm	4.50 mm	113 cm ²	0.17 kN/m	5.60 kg	
GI 30E	75 mm	316 mm	3000 mm	4.50 mm	165 cm ²	0.25 kN/m	6.87 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	t	A	QSK	weight
GI 06E4	75 mm	76 mm	3000 mm	4.50 mm	33 cm ²	0.05 kN/m	4.18 kg	
GI 12E4	75 mm	136 mm	3000 mm	4.50 mm	67 cm ²	0.10 kN/m	5.25 kg	
GI 20E4	75 mm	216 mm	3000 mm	4.50 mm	113 cm ²	0.17 kN/m	5.67 kg	
GI 30E4	75 mm	316 mm	3000 mm	4.50 mm	165 cm ²	0.25 kN/m	7.01 kg	

Product: Product

height: height

width: width

length: length


t: material thickness

A: cross section area



QSK: distributed load control cable

weight: weight

LOAD DIAGRAM

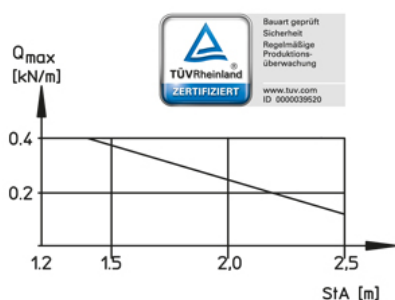

DETAILS / APPLICATIONS

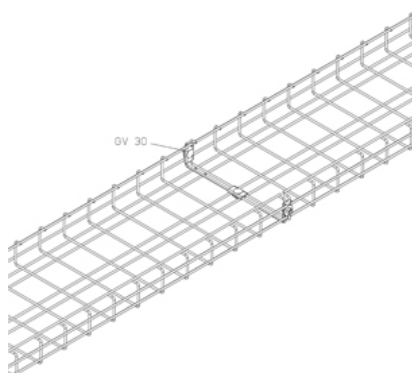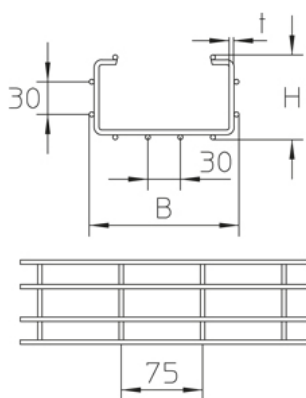

ACCESSORIES

MP-G, GV 30, GVD 30, GV-L 30, GVU, GVK, GTR 60, KLU,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

