


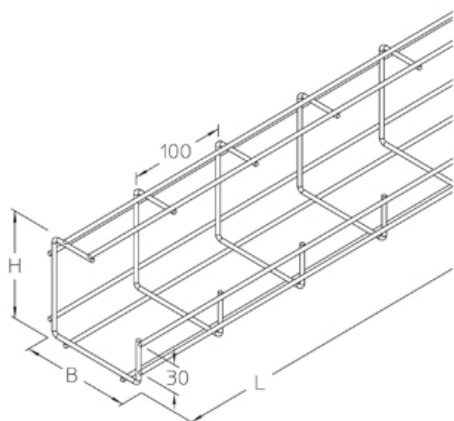

## GTDW

mesh cable tray, G-shape

Mesh cable tray, G-shape, for mounting to ceiling or wall.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

galvanized, according to ISO 4042

| Артикул   | Product | height | width   | length  | t                  | A         | QSK     | weight |
|-----------|---------|--------|---------|---------|--------------------|-----------|---------|--------|
| GTDW 8GV  | 64 mm   | 95 mm  | 3000 mm | 4.00 mm | 38 cm <sup>2</sup> | 0.06 kN/m | 2.38 kg |        |
| GTDW 6GV  | 44 mm   | 75 mm  | 3000 mm | 4.00 mm | 17 cm <sup>2</sup> | 0.02 kN/m | 2.20 kg |        |
| GTDW 10GV | 115 mm  | 115 mm | 3000 mm | 4.00 mm | 98 cm <sup>2</sup> | 0.15 kN/m | 3.28 kg |        |
| GTDW 13GV | 54 mm   | 149 mm | 3000 mm | 4.50 mm | 54 cm <sup>2</sup> | 0.08 kN/m | 1.28 kg |        |

Pre-galvanised (DIN EN 10244-2)

| Артикул  | Product | height | width   | length  | t                  | A         | QSK     | weight |
|----------|---------|--------|---------|---------|--------------------|-----------|---------|--------|
| GTDW 6S  | 44 mm   | 75 mm  | 3000 mm | 4.00 mm | 17 cm <sup>2</sup> | 0.02 kN/m | 2.26 kg |        |
| GTDW 8S  | 64 mm   | 95 mm  | 3000 mm | 4.00 mm | 38 cm <sup>2</sup> | 0.06 kN/m | 2.38 kg |        |
| GTDW 10S | 115 mm  | 115 mm | 3000 mm | 4.00 mm | 98 cm <sup>2</sup> | 0.15 kN/m | 3.28 kg |        |
| GTDW 13S | 54 mm   | 149 mm | 3000 mm | 4.50 mm | 54 cm <sup>2</sup> | 0.08 kN/m | 1.28 kg |        |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)





| Артикул  | Product | height | width   | length  | t                  | A         | QSK     | weight |
|----------|---------|--------|---------|---------|--------------------|-----------|---------|--------|
| GTDW 6F  | 44 mm   | 75 mm  | 3000 mm | 4.00 mm | 17 cm <sup>2</sup> | 0.02 kN/m | 2.41 kg |        |
| GTDW 8F  | 64 mm   | 95 mm  | 3000 mm | 4.00 mm | 38 cm <sup>2</sup> | 0.06 kN/m | 2.55 kg |        |
| GTDW 10F | 115 mm  | 115 mm | 3000 mm | 4.00 mm | 98 cm <sup>2</sup> | 0.15 kN/m | 3.51 kg |        |
| GTDW 13F | 54 mm   | 149 mm | 3000 mm | 4.50 mm | 54 cm <sup>2</sup> | 0.08 kN/m | 1.37 kg |        |

Stainless steel, according to ASTM 304 / BS 304 S 3

| Артикул  | Product | height | width   | length  | t                  | A         | QSK     | weight |
|----------|---------|--------|---------|---------|--------------------|-----------|---------|--------|
| GTDW 6E  | 44 mm   | 75 mm  | 3000 mm | 4.00 mm | 17 cm <sup>2</sup> | 0.02 kN/m | 2.26 kg |        |
| GTDW 8E  | 64 mm   | 95 mm  | 3000 mm | 4.00 mm | 38 cm <sup>2</sup> | 0.06 kN/m | 2.38 kg |        |
| GTDW 10E | 115 mm  | 115 mm | 3000 mm | 4.00 mm | 98 cm <sup>2</sup> | 0.15 kN/m | 3.28 kg |        |
| GTDW 13E | 54 mm   | 149 mm | 3000 mm | 4.50 mm | 54 cm <sup>2</sup> | 0.08 kN/m | 1.28 kg |        |

**Product:** Product  
**height:** height  
**width:** width  
**length:** length  
**t:** material thickness  
**A:** cross section area  
**QSK:** distributed load control cable  
**weight:** weight

## DETAILS / APPLICATIONS

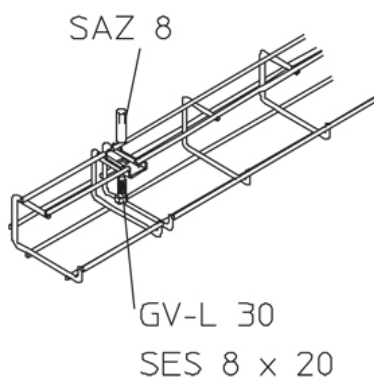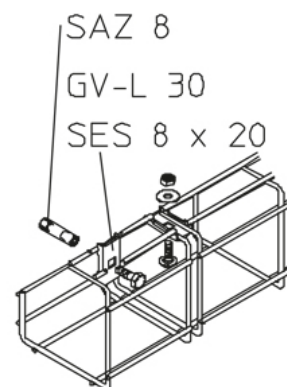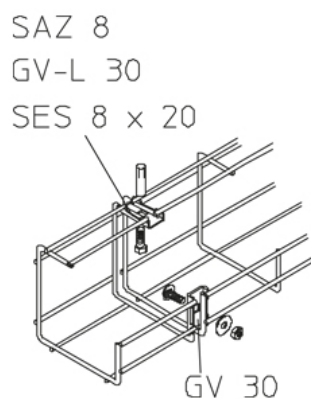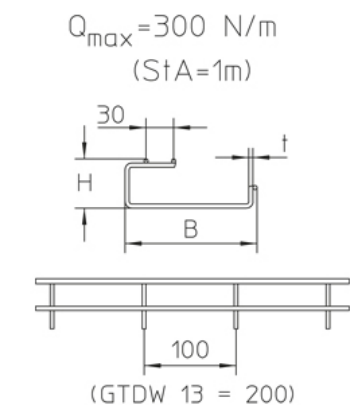

## ACCESSORIES

MP-G, GV 30, GVD 30, GV-L 30, GVU, GVK, KLU,

