


SLAA

ship duct attachment branch, height = 30 mm

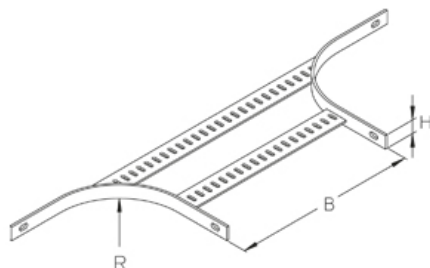

Bright rolled

Артикул	Product	height	width	radius	weight
SLAA 075B	30 mm	75 mm	100 mm	1.40 kg	
SLAA 100B	30 mm	100 mm	100 mm	1.50 kg	
SLAA 150B	30 mm	150 mm	100 mm	1.70 kg	
SLAA 200B	30 mm	200 mm	100 mm	1.80 kg	
SLAA 250B	30 mm	250 mm	100 mm	2 kg	
SLAA 300B	30 mm	300 mm	150 mm	2.50 kg	
SLAA 400B	30 mm	400 mm	150 mm	2.80 kg	
SLAA 500B	30 mm	500 mm	200 mm	3.40 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	radius	weight
SLAA 075F	30 mm	75 mm	100 mm	1.40 kg	
SLAA 100F	30 mm	100 mm	100 mm	1.60 kg	
SLAA 150F	30 mm	150 mm	100 mm	1.70 kg	
SLAA 200F	30 mm	200 mm	100 mm	1.80 kg	
SLAA 250F	30 mm	250 mm	100 mm	2 kg	
SLAA 300F	30 mm	300 mm	150 mm	2.50 kg	
SLAA 400F	30 mm	400 mm	150 mm	2.80 kg	
SLAA 500F	30 mm	500 mm	200 mm	3.40 kg	

weld-primed

Артикул	Product	height	width	radius	weight
SLAA 075M	30 mm	75 mm	100 mm	1.40 kg	
SLAA 100M	30 mm	100 mm	100 mm	1.50 kg	
SLAA 150M	30 mm	150 mm	100 mm	1.70 kg	
SLAA 200M	30 mm	200 mm	100 mm	1.80 kg	
SLAA 250M	30 mm	250 mm	100 mm	2 kg	

Артикул	Product	height	width	radius	weight
SLAA 300M	30 mm	300 mm	150 mm	2.50 kg	
SLAA 400M	30 mm	400 mm	150 mm	2.80 kg	
SLAA 500M	30 mm	500 mm	200 mm	3.40 kg	

Product: Product


height: height

width: width

radius: radius

weight: weight

DETAILS / APPLICATIONS

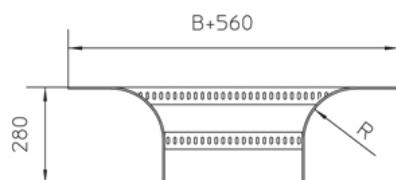

ACCESSORIES

SLV, SLVV, SLW,

