


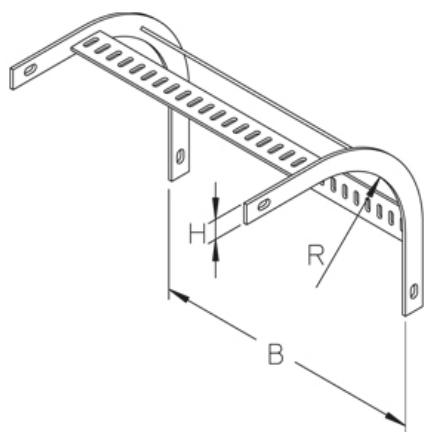

## SLS

ship ladder inside outside riser, height = 30 mm

ship ladder bend 90 for vertical change of direction

## Bright rolled

| Артикул  | Product | height | width  | radius  | weight |
|----------|---------|--------|--------|---------|--------|
| SLS 075B | 30 mm   | 75 mm  | 150 mm | 0.90 kg |        |
| SLS 100B | 30 mm   | 100 mm | 150 mm | 1 kg    |        |
| SLS 150B | 30 mm   | 150 mm | 150 mm | 1 kg    |        |
| SLS 200B | 30 mm   | 200 mm | 150 mm | 1.30 kg |        |
| SLS 250B | 30 mm   | 250 mm | 150 mm | 1.50 kg |        |
| SLS 300B | 30 mm   | 300 mm | 150 mm | 1.70 kg |        |
| SLS 400B | 30 mm   | 400 mm | 150 mm | 2.80 kg |        |
| SLS 500B | 30 mm   | 500 mm | 150 mm | 3.30 kg |        |

## Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул  | Product | height | width  | radius  | weight |
|----------|---------|--------|--------|---------|--------|
| SLS 075F | 30 mm   | 75 mm  | 150 mm | 0.90 kg |        |
| SLS 100F | 30 mm   | 100 mm | 150 mm | 1 kg    |        |
| SLS 150F | 30 mm   | 150 mm | 150 mm | 1 kg    |        |
| SLS 200F | 30 mm   | 200 mm | 150 mm | 1.30 kg |        |
| SLS 250F | 30 mm   | 250 mm | 150 mm | 1.50 kg |        |
| SLS 300F | 30 mm   | 300 mm | 150 mm | 1.70 kg |        |
| SLS 400F | 30 mm   | 400 mm | 150 mm | 2.80 kg |        |
| SLS 500F | 30 mm   | 500 mm | 150 mm | 3.30 kg |        |

## weld-primed

| Артикул  | Product | height | width  | radius  | weight |
|----------|---------|--------|--------|---------|--------|
| SLS 075M | 30 mm   | 75 mm  | 150 mm | 0.90 kg |        |
| SLS 100M | 30 mm   | 100 mm | 150 mm | 1 kg    |        |
| SLS 150M | 30 mm   | 150 mm | 150 mm | 1 kg    |        |
| SLS 200M | 30 mm   | 200 mm | 150 mm | 1.30 kg |        |
| SLS 250M | 30 mm   | 250 mm | 150 mm | 1.50 kg |        |

| Артикул  | Product | height | width  | radius  | weight |
|----------|---------|--------|--------|---------|--------|
| SLS 300M | 30 mm   | 300 mm | 150 mm | 1.70 kg |        |
| SLS 400M | 30 mm   | 400 mm | 150 mm | 2.80 kg |        |
| SLS 500M | 30 mm   | 500 mm | 150 mm | 3.30 kg |        |

**Product:** Product


**height:** height

**width:** width

**radius:** radius

**weight:** weight

## DETAILS / APPLICATIONS

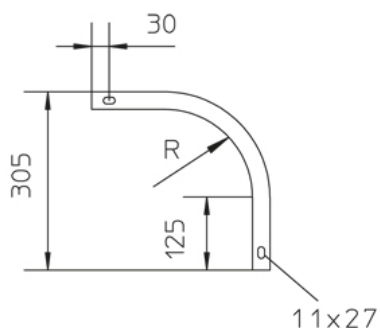

## ACCESSORIES

SLV, SLVV, SLW,

