


KWF

wall/handle bracket, light-duty

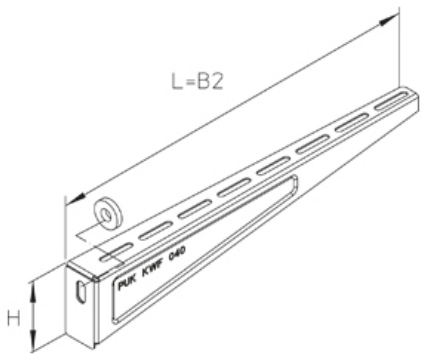

Wall/handle bracket, light-duty version made of folded sheet steel. Certified according to DIN EN 61537. For mounting on walls or hanging struts.

F_D/P : coefficient for calculation of the dowel load F_D with effective bracket load P respectively the sum of effective bracket loads. The load specifications are only valid with sufficient anchoring to the load-bearing substrate or with proper installation on hanging struts.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Артикул	Product	height	width	width	length	Pmax	FD/P	weight	incl.
KWF 010S	80 mm	100 mm	120 mm	120 mm	1.20 kN	1.58	0.21 kg	show all inclusive accessoires	
KWF 020S	80 mm	200 mm	220 mm	220 mm	1.20 kN	2.33	0.29 kg	show all inclusive accessoires	
KWF 030S	80 mm	300 mm	320 mm	320 mm	1.20 kN	3.15	0.43 kg	show all inclusive accessoires	
KWF 040S	80 mm	400 mm	420 mm	420 mm	1.20 kN	3.99	0.50 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	width	length	Pmax	FD/P	weight	incl.
KWF 010F	80 mm	100 mm	120 mm	120 mm	1.20 kN	1.58	0.24 kg	show all inclusive accessoires	
KWF 020F	80 mm	200 mm	220 mm	220 mm	1.20 kN	2.33	0.32 kg	show all inclusive accessoires	
KWF 030F	80 mm	300 mm	320 mm	320 mm	1.20 kN	3.15	0.47 kg	show all inclusive accessoires	
KWF 040F	80 mm	400 mm	420 mm	420 mm	1.20 kN	3.99	0.54 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
width: width
length: length
Pmax: Maximum load
FD/P: dowel-to-anchor load
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

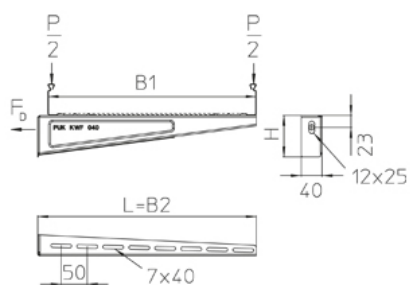

ACCESSORIES

KDU 40, KDU 57, KHU 40, KHU 57,

