


DB

ceiling fixed bracket

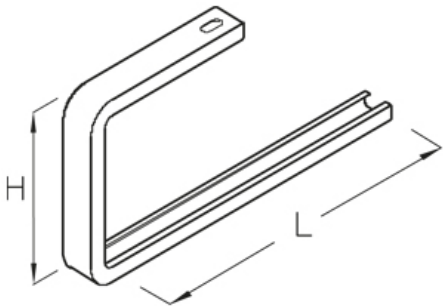

ceiling fixed bracket, profile rail 30x15 mm

F_D/P : coefficient for calculation of the dowel load F_D with effective bracket load P respectively the sum of effective bracket loads. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	Pmax	FD/P	weight
DB 10S	170 mm	100 mm	110 mm	0.60 kN	1.20	0.25 kg	
DB 20S	170 mm	200 mm	210 mm	0.40 kN	1.10	0.36 kg	
DB 30S	170 mm	300 mm	310 mm	0.28 kN	1.10	0.47 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	Pmax	FD/P	weight
DB 10E	170 mm	100 mm	110 mm	0.50 kN	1.20	0.30 kg	
DB 20E	170 mm	200 mm	210 mm	0.35 kN	1.10	0.44 kg	
DB 30E	170 mm	300 mm	310 mm	0.25 kN	1.10	0.58 kg	

Product: Product

height: height

width: width


length: length

Pmax: Maximum load

FD/P: dowel-to-anchor load

weight: weight

DETAILS / APPLICATIONS

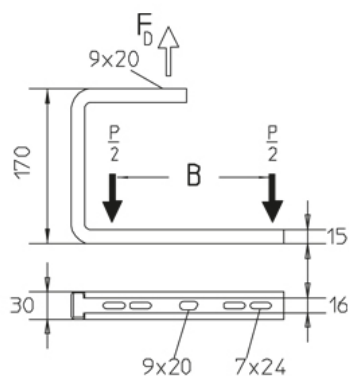

ACCESSORIES

KLR, SAZ,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

