


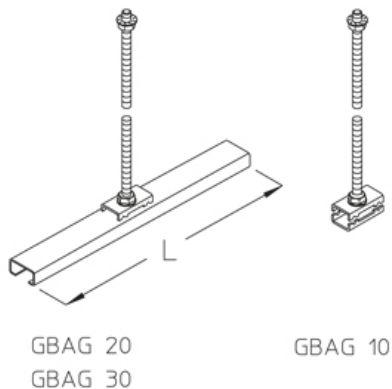

GBAG

centre suspension, external

External centre suspension with threaded rod for mesh cable trays. For tray widths of up to 300 mm. A threaded rod (L = 1000 mm) is included in the set.

F_D/P : coefficient for calculation of the dowel load F_D with effective bracket load P respectively the sum of effective bracket loads.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Артикул	Product	width	length	Pmax	FD/P	weight	incl.
GBAG 10S	100 mm	41 mm	0.50 kN	1	0.42 kg	show all inclusive accessoires	
GBAG 20S	200 mm	180 mm	0.50 kN	1	0.50 kg	show all inclusive accessoires	
GBAG 30S	300 mm	280 mm	0.50 kN	1	0.57 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	length	Pmax	FD/P	weight	incl.
GBAG 10E	100 mm	41 mm	0.50 kN	1	0.42 kg	show all inclusive accessoires	
GBAG 20E	200 mm	180 mm	0.50 kN	1	0.50 kg	show all inclusive accessoires	
GBAG 30E	300 mm	280 mm	0.50 kN	1	0.57 kg	show all inclusive accessoires	

Product: Product
width: width
length: length
Pmax: Maximum load
FD/P: dowel-to-anchor load
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

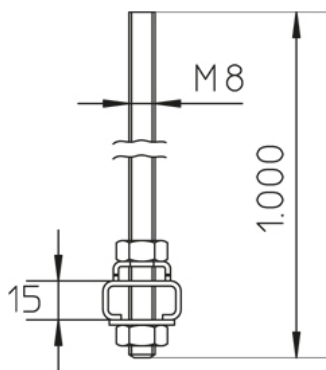

ACCESSORIES

SAZ,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

