


MA 60

centre suspension, internal

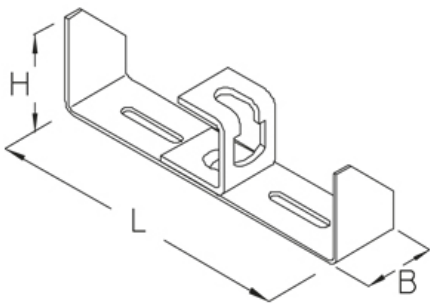

Internal centre suspension for cable trays (height 60 mm). For tray widths of up to 300 mm.

The centre suspension is not suitable for installation trays.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	Pmax	weight
MA 60-10S	56 mm	40 mm	90 mm	0.26 kN	0.26 kg	
MA 60-20S	56 mm	40 mm	190 mm	0.26 kN	0.36 kg	
MA 60-30S	56 mm	40 mm	290 mm	0.26 kN	0.45 kg	

Product: Product

height: height


width: width

length: length

Pmax: Maximum load

weight: weight

DETAILS / APPLICATIONS



ACCESSORIES

GB, KLR, SAZ,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

