




KA 30

bracket, light-duty

bracket, light duty, for ceiling bracket support profile 41

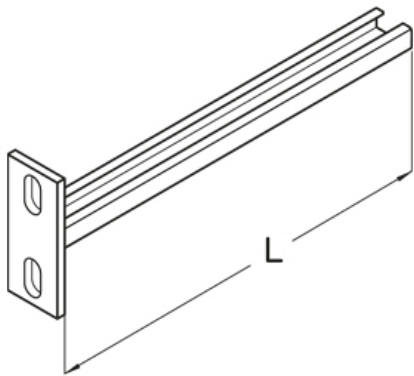

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	Pmax	weight
KA 30-010F	100 mm	125 mm	0.50 kN	0.20 kg	
KA 30-015F	150 mm	175 mm	0.50 kN	0.30 kg	
KA 30-020F	200 mm	225 mm	0.50 kN	0.30 kg	
KA 30-025F	250 mm	275 mm	0.50 kN	0.40 kg	
KA 30-030F	300 mm	325 mm	0.50 kN	0.40 kg	
KA 30-040F	400 mm	425 mm	0.50 kN	0.50 kg	

Product: Product


width: width

length: length

Pmax: Maximum load

weight: weight

DETAILS / APPLICATIONS

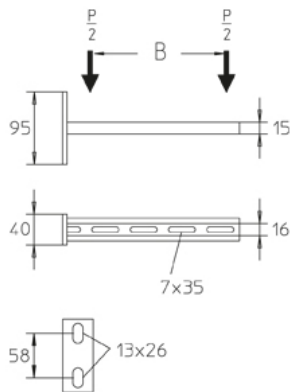

ACCESSORIES

AM16, HS16, KLR,



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

