

## KDAG 41

ceiling fixed bracket, 41x41 mm

ceiling bracket support made of profile rail 41x41 mm with welded head plate

$F_D/P$ : coefficient for calculation of the dowel load  $F_D$  with effective bracket load  $P$  respectively the sum of effective bracket loads.



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)



| Артикул     | Product | length  | weight |
|-------------|---------|---------|--------|
| KDAG 41-02F | 200 mm  | 1.10 kg |        |
| KDAG 41-03F | 300 mm  | 1.40 kg |        |
| KDAG 41-04F | 400 mm  | 1.70 kg |        |
| KDAG 41-05F | 500 mm  | 1.90 kg |        |
| KDAG 41-06F | 600 mm  | 2.20 kg |        |
| KDAG 41-07F | 700 mm  | 2.50 kg |        |
| KDAG 41-08F | 800 mm  | 2.70 kg |        |
| KDAG 41-09F | 900 mm  | 3 kg    |        |
| KDAG 41-10F | 1000 mm | 3.20 kg |        |

**Product:** Product

**length:** length

**weight:** weight

## DETAILS / APPLICATIONS

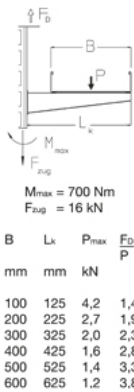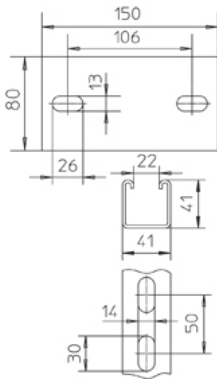

## ACCESSORIES

KA 30, KA 41, SA 2, AM22, AMF22, SD,



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

