


KDIA-G

adapter for KDI, welded

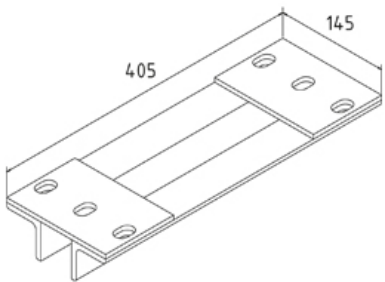

The KDIA-G is an adapter for the KDI support to reduce the loads on the dowels or to be able to distribute the load between 4 dowels in accordance with the approval.



KDI is placed in KDIA-G. With the KDIA-G, the KDI is fixed directly to the concrete.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	weight
KDIA-G F	56 mm	145 mm	405 mm	6.26 kg	





Product: Product
height: height
width: width
length: length
weight: weight

DETAILS / APPLICATIONS

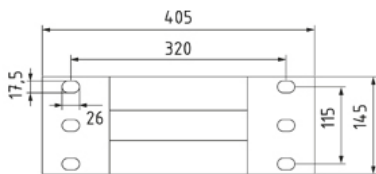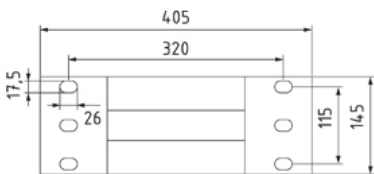

B mm	L _k mm	F _d /P
100	120	0,4
200	220	0,5
300	320	0,6
400	420	0,7
500	520	0,7
600	620	0,8

B mm	L _k mm	F _d /P
100	120	0,4
200	220	0,5
300	320	0,6
400	420	0,7
500	520	0,7
600	620	0,8

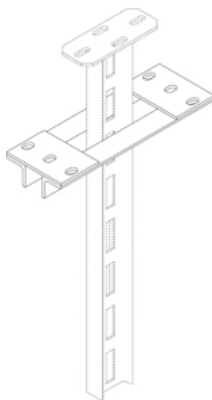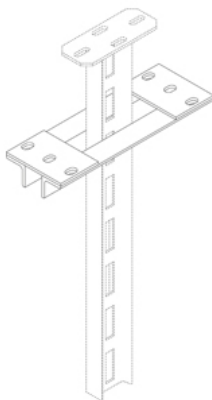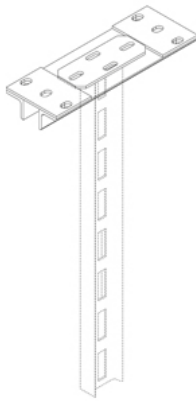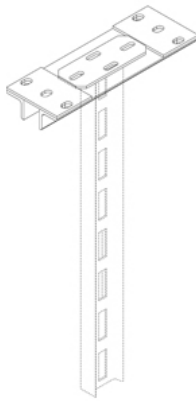

ACCESSORIES

KDI,

