


BL 6

corner angle, KHU 60

Wall angle for fastening bracket supports KHU 60 to walls.

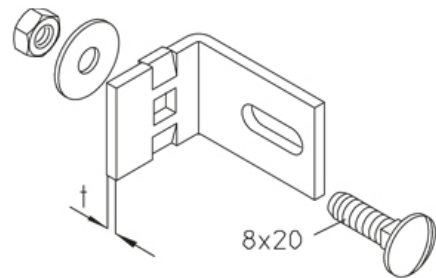

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	t	weight	incl.
BL 6S	4.00 mm	0.05 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	t	weight	incl.
BL 6F	4.00 mm	0.05 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	t	weight	incl.
BL 6E	3.00 mm	0.05 kg	show all inclusive accessoires	

Product: Product

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

