



KHU 40

bracket support, 40x30 mm

Bracket support, U-profile 40x30x2 mm, continuously three-way perforated.

Higher loads can be achieved by using the support piece.

galvanized, according to ISO 4042

Артикул	Product	height	width	length	weight
KHU 40-30GV	30 mm	40 mm	3000 mm	3.37 kg	

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	weight
KHU 40-02S	30 mm	40 mm	200 mm	0.22 kg	
KHU 40-03S	30 mm	40 mm	300 mm	0.34 kg	
KHU 40-04S	30 mm	40 mm	400 mm	0.45 kg	
KHU 40-05S	30 mm	40 mm	500 mm	0.56 kg	
KHU 40-06S	30 mm	40 mm	600 mm	0.67 kg	
KHU 40-07S	30 mm	40 mm	700 mm	0.79 kg	
KHU 40-08S	30 mm	40 mm	800 mm	0.90 kg	
KHU 40-09S	30 mm	40 mm	900 mm	1.01 kg	
KHU 40-10S	30 mm	40 mm	1000 mm	1.12 kg	
KHU 40-11S	30 mm	40 mm	1100 mm	1.23 kg	
KHU 40-12S	30 mm	40 mm	1200 mm	1.35 kg	
KHU 40-13S	30 mm	40 mm	1300 mm	1.55 kg	
KHU 40-14S	30 mm	40 mm	1400 mm	1.60 kg	
KHU 40-15S	30 mm	40 mm	1500 mm	1.70 kg	
KHU 40-30S	30 mm	40 mm	3000 mm	3.40 kg	
KHU 40-60S	30 mm	40 mm	6000 mm	6.73 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	weight
KHU 40-02F	30 mm	40 mm	200 mm	0.24 kg	
KHU 40-03F	30 mm	40 mm	300 mm	0.36 kg	
KHU 40-04F	30 mm	40 mm	400 mm	0.48 kg	
KHU 40-05F	30 mm	40 mm	500 mm	0.60 kg	

Артикул	Product	height	width	length	weight
KHU 40-06F	30 mm	40 mm	600 mm	0.72 kg	
KHU 40-07F	30 mm	40 mm	700 mm	0.84 kg	
KHU 40-08F	30 mm	40 mm	800 mm	0.96 kg	
KHU 40-09F	30 mm	40 mm	900 mm	1.10 kg	
KHU 40-10F	30 mm	40 mm	1000 mm	1.20 kg	
KHU 40-11F	30 mm	40 mm	1100 mm	1.32 kg	
KHU 40-12F	30 mm	40 mm	1200 mm	1.44 kg	
KHU 40-13F	30 mm	40 mm	1300 mm	1.60 kg	
KHU 40-14F	30 mm	40 mm	1400 mm	1.70 kg	
KHU 40-15F	30 mm	40 mm	1500 mm	1.80 kg	
KHU 40-30F	30 mm	40 mm	3000 mm	3.60 kg	
KHU 40-60F	30 mm	40 mm	6000 mm	7.20 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	weight
KHU 40-02E	30 mm	40 mm	200 mm	0.23 kg	
KHU 40-03E	30 mm	40 mm	300 mm	0.34 kg	
KHU 40-04E	30 mm	40 mm	400 mm	0.45 kg	
KHU 40-05E	30 mm	40 mm	500 mm	0.57 kg	
KHU 40-06E	30 mm	40 mm	600 mm	0.68 kg	
KHU 40-07E	30 mm	40 mm	700 mm	0.79 kg	
KHU 40-08E	30 mm	40 mm	800 mm	0.90 kg	
KHU 40-09E	30 mm	40 mm	900 mm	1.02 kg	
KHU 40-10E	30 mm	40 mm	1000 mm	1.13 kg	
KHU 40-11E	30 mm	40 mm	1100 mm	1.24 kg	
KHU 40-12E	30 mm	40 mm	1200 mm	1.36 kg	
KHU 40-13E	30 mm	40 mm	1300 mm	1.47 kg	
KHU 40-14E	30 mm	40 mm	1400 mm	1.60 kg	
KHU 40-15E	30 mm	40 mm	1500 mm	1.70 kg	
KHU 40-30E	30 mm	40 mm	3000 mm	3.40 kg	
KHU 40-60E	30 mm	40 mm	6000 mm	6.80 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	weight
KHU 40-02E4	30 mm	40 mm	200 mm	0.23 kg	
KHU 40-03E4	30 mm	40 mm	300 mm	0.34 kg	
KHU 40-04E4	30 mm	40 mm	400 mm	0.46 kg	
KHU 40-05E4	30 mm	40 mm	500 mm	0.57 kg	
KHU 40-06E4	30 mm	40 mm	600 mm	0.69 kg	
KHU 40-07E4	30 mm	40 mm	700 mm	0.80 kg	
KHU 40-08E4	30 mm	40 mm	800 mm	0.92 kg	
KHU 40-09E4	30 mm	40 mm	900 mm	1.03 kg	

Артикул	Product	height	width	length	weight
KHU 40-10E4	30 mm	40 mm	1000 mm	1.14 kg	
KHU 40-11E4	30 mm	40 mm	1100 mm	1.26 kg	
KHU 40-12E4	30 mm	40 mm	1200 mm	1.40 kg	
KHU 40-13E4	30 mm	40 mm	1300 mm	1.50 kg	
KHU 40-14E4	30 mm	40 mm	1400 mm	1.60 kg	
KHU 40-15E4	30 mm	40 mm	1500 mm	1.72 kg	
KHU 40-30E4	30 mm	40 mm	3000 mm	3.43 kg	
KHU 40-60E4	30 mm	40 mm	6000 mm	6.90 kg	

Product: Product




height: height

width: width


length: length

weight: weight

DETAILS / APPLICATIONS

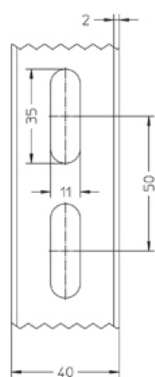

$$\begin{aligned}
 A &= 1.22 \text{ cm}^2 \\
 W_y &= 1.69 \text{ cm}^3 \\
 W_z &= 0.70 \text{ cm}^3 \\
 I_y &= 3.37 \text{ cm}^4 \\
 I_z &= 1.42 \text{ cm}^4
 \end{aligned}$$



$$\begin{aligned}
 A &= 1.22 \text{ cm}^2 \\
 W_y &= 1.69 \text{ cm}^3 \\
 W_z &= 0.70 \text{ cm}^3 \\
 I_y &= 3.37 \text{ cm}^4 \\
 I_z &= 1.42 \text{ cm}^4
 \end{aligned}$$

ACCESSORIES

KWF, KW, KDU 40, BGU 40, BGUD, BGUDW, KHUV 40, KHUSS 40, SU 40,

