


KHUV 57

connector, KHU 57

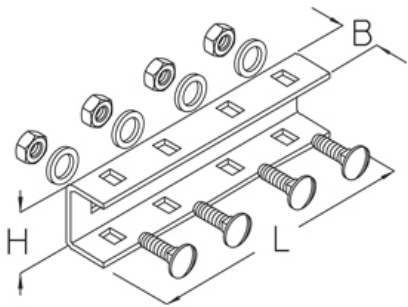

galvanized, according to ISO 4042

Артикул	Product	height	width	length	t	weight	incl.
KHUV 57GV	63 mm	32.50 mm	210 mm	2.50 mm	0.59 kg	show all inclusive accessoires	

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight	incl.
KHUV 57S	63 mm	32.50 mm	210 mm	2.50 mm	0.60 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight	incl.
KHUV 57F	63 mm	32.50 mm	210 mm	2.50 mm	0.63 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	weight	incl.
KHUV 57E	63 mm	32.50 mm	210 mm	2.50 mm	0.60 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	t	weight	incl.
KHUV 57E4	63 mm	32.50 mm	210 mm	2.50 mm	0.61 kg	show all inclusive accessoires	

Product: Product

height: height

width: width

length: length

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

