


KHUV 80

connector, KHU 80

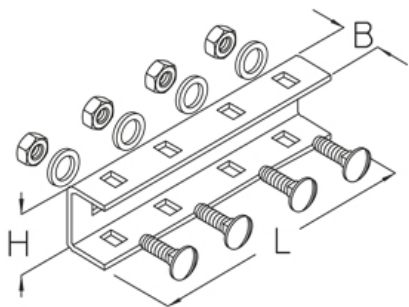

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight	incl.
KHUV 80F	69 mm	54 mm	310 mm	4.00 mm	1.92 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight
incl.: incl.

