


DKSL

ceiling fixed bracket, light-duty



Ceiling bracket, light version made of W-/trapezoidal profile 60x20x2.5 mm, perforated in the center, suspension length 170 mm.

F_D/P : coefficient for calculation of the dowel load F_D with effective bracket load P respectively the sum of effective bracket loads. Load specifications only apply for mounting as ceiling bracket. The spacer KSL-SP must be fitted when installing the ceiling to prevent deformation of the profile due to frictional locking of the fastening screw.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Артикул	Product	height	width	width	length	Pmax	FD/P	weight	incl.
DKSL 010S	170 mm	100 mm	120 mm	140 mm	0.90 kN	3.10	0.62 kg	show all inclusive accessoires	
DKSL 020S	170 mm	200 mm	220 mm	240 mm	0.50 kN	2.10	0.79 kg	show all inclusive accessoires	
DKSL 030S	170 mm	300 mm	320 mm	340 mm	0.40 kN	2.70	0.94 kg	show all inclusive accessoires	
DKSL 040S	170 mm	400 mm	420 mm	440 mm	0.30 kN	3.30	1.11 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	width	length	Pmax	FD/P	weight	incl.
DKSL 010F	170 mm	100 mm	120 mm	140 mm	0.90 kN	3.10	0.86 kg	show all inclusive accessoires	
DKSL 020F	170 mm	200 mm	220 mm	240 mm	0.50 kN	2.10	0.84 kg	show all inclusive accessoires	
DKSL 030F	170 mm	300 mm	320 mm	340 mm	0.40 kN	2.70	1.00 kg	show all inclusive accessoires	
DKSL 040F	170 mm	400 mm	420 mm	440 mm	0.30 kN	3.30	1.18 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
width: width
length: length
Pmax: Maximum load
FD/P: dowel-to-anchor load
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

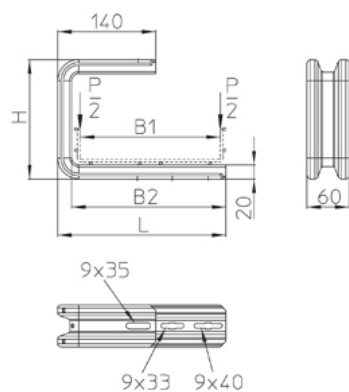

ACCESSORIES

KLU, KLRL, SD, SAZ,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

