


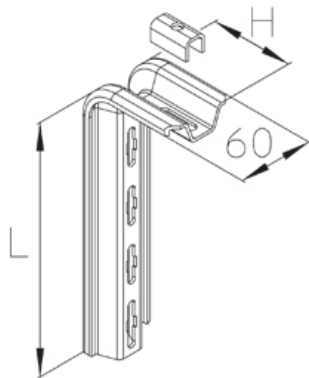

KDSL

bracket support, light-duty bracket support

Ceiling bracket, light version made of W-/trapezoidal profile 60x20x2.5 mm, perforated in the center. Certified according to DIN EN 61537. For mounting on horizontal ceilings. support distance max. 1.2 m.

F_D/P : coefficient for calculation of the dowel load F_D with effective bracket load P respectively the sum of effective bracket loads. Load specifications only apply for mounting as ceiling bracket. The spacer KSL-SP must be fitted when installing the ceiling to prevent deformation of the profile due to frictional locking of the fastening screw.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	length	t	weight	incl.
KDSL 010S	90 mm	140 mm	2.50 mm	0.39 kg	show all inclusive accessoires	
KDSL 060S	90 mm	640 mm	2.50 mm	1.21 kg	show all inclusive accessoires	
KDSL 050S	90 mm	540 mm	2.50 mm	1.06 kg	show all inclusive accessoires	
KDSL 040S	90 mm	440 mm	2.50 mm	0.89 kg	show all inclusive accessoires	
KDSL 030S	90 mm	340 mm	2.50 mm	0.72 kg	show all inclusive accessoires	
KDSL 025S	90 mm	290 mm	2.50 mm	0.64 kg	show all inclusive accessoires	
KDSL 020S	90 mm	240 mm	2.50 mm	0.56 kg	show all inclusive accessoires	
KDSL 015S	90 mm	190 mm	2.50 mm	0.48 kg	show all inclusive accessoires	



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	length	t	weight	incl.
KDSL 050F	90 mm	540 mm	2.50 mm	1.13 kg	show all inclusive accessoires	
KDSL 040F	90 mm	440 mm	2.50 mm	0.95 kg	show all inclusive accessoires	
KDSL 030F	90 mm	340 mm	2.50 mm	0.76 kg	show all inclusive accessoires	
KDSL 025F	90 mm	290 mm	2.50 mm	0.68 kg	show all inclusive accessoires	
KDSL 020F	90 mm	240 mm	2.50 mm	0.59 kg	show all inclusive accessoires	
KDSL 015F	90 mm	190 mm	2.50 mm	0.50 kg	show all inclusive accessoires	
KDSL 010F	90 mm	140 mm	2.50 mm	0.41 kg	show all inclusive accessoires	
KDSL 060F	90 mm	640 mm	2.50 mm	1.29 kg	show all inclusive accessoires	


Product: Product
height: height
length: length
t: material thickness
weight: weight
incl.: incl.



DETAILS / APPLICATIONS

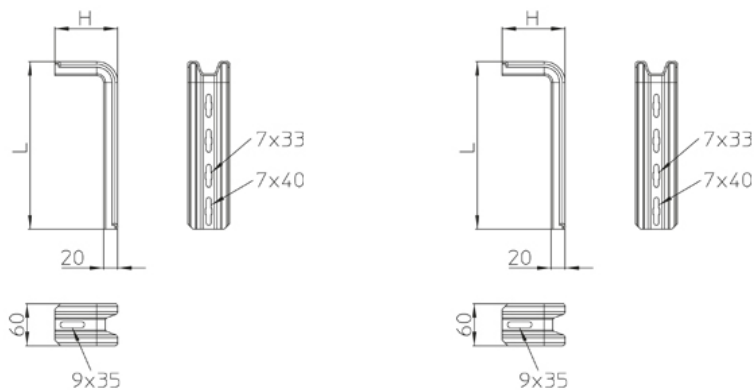

B mm	L _k mm	P _{max} kN	F _D /P
100	140	1,8	3,4
150	190	1,4	4,1
200	240	1,1	4,8
250	290	1,0	5,5
300	340	0,8	6,2
400	440	0,6	7,6



B mm	L _k mm	P _{max} kN	F _D /P
100	140	1,8	3,4
150	190	1,4	4,1
200	240	1,1	4,8
250	290	1,0	5,5
300	340	0,8	6,2
400	440	0,6	7,6

ACCESSORIES

KSL, SD,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

