


KSLW

wall bracket, light-duty

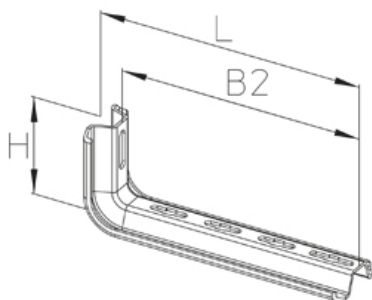

Wall bracket, light version made of W-/trapezoidal profile 60x20 mm, perforated in the center. Certified according to DIN EN 61537. For mounting on walls. support distance max. 1.2 m.

F_D/P : coefficient for calculation of the dowel load F_D with effective bracket load P respectively the sum of effective bracket loads. Load specifications only apply for mounting as wall bracket.. The spacer KSL-SP must be fitted when installing the profile on the wall to prevent deformation of the profile due to frictional locking of the fastening screw.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Артикул	Product	height	width	width	length	Pmax	FD/P	weight	incl.
KSLW 010S	90 mm	100 mm	120 mm	140 mm	1.30 kN	2.80	0.39 kg	show all inclusive accessoires	
KSLW 015S	90 mm	150 mm	170 mm	190 mm	1.00 kN	3.40	0.48 kg	show all inclusive accessoires	
KSLW 020S	90 mm	200 mm	220 mm	240 mm	0.90 kN	4.10	0.56 kg	show all inclusive accessoires	
KSLW 025S	90 mm	250 mm	270 mm	290 mm	0.70 kN	4.80	0.64 kg	show all inclusive accessoires	
KSLW 030S	90 mm	300 mm	320 mm	340 mm	0.60 kN	5.50	0.72 kg	show all inclusive accessoires	
KSLW 040S	90 mm	400 mm	420 mm	440 mm	0.50 kN	6.90	0.89 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	width	length	Pmax	FD/P	weight	incl.
KSLW 010F	90 mm	100 mm	120 mm	140 mm	1.30 kN	2.80	0.41 kg	show all inclusive accessoires	
KSLW 015F	90 mm	150 mm	170 mm	190 mm	1.00 kN	3.40	0.50 kg	show all inclusive accessoires	
KSLW 020F	90 mm	200 mm	220 mm	240 mm	0.90 kN	4.10	0.59 kg	show all inclusive accessoires	
KSLW 025F	90 mm	250 mm	270 mm	290 mm	0.70 kN	4.80	0.68 kg	show all inclusive accessoires	
KSLW 030F	90 mm	300 mm	320 mm	340 mm	0.60 kN	5.50	0.76 kg	show all inclusive accessoires	
KSLW 040F	90 mm	400 mm	420 mm	440 mm	0.50 kN	6.90	0.95 kg	show all inclusive accessoires	

Product: Product**height:** height**width:** width**width:** width**length:** length**Pmax:** Maximum load**FD/P:** dowel-to-anchor load**weight:** weight**incl.:** incl.

DETAILS / APPLICATIONS

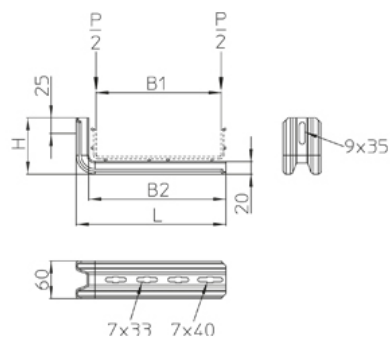

ACCESSORIES

KLRL, SD,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

