


A 2

profile rail 30x15 mm, not perforated

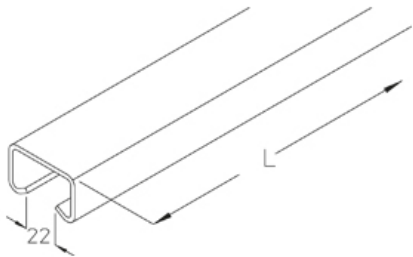

profile rail 50x31x3.25 mm, without perforation, slot size 22 mm

Bright rolled


Артикул	Product	height	width	length	t	weight
A 2-30B	31 mm	50 mm	3000 mm	3.25 mm	8.80 kg	
A 2-60B	31 mm	50 mm	6000 mm	3.25 mm	17.60 kg	


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	weight
A 2-30F	31 mm	50 mm	3000 mm	3.25 mm	9.40 kg	
A 2-60F	31 mm	50 mm	6000 mm	3.25 mm	18.80 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

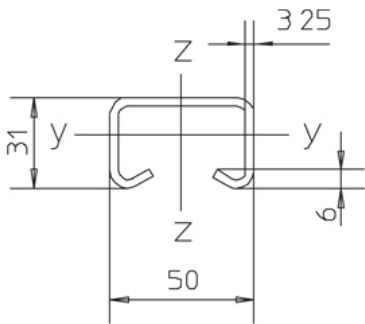


$$\begin{aligned}W_y &= 2.45 \text{ cm}^3 \\W_z &= 5.42 \text{ cm}^3 \\I_y &= 4.33 \text{ cm}^4 \\I_z &= 13.54 \text{ cm}^4\end{aligned}$$


$$\begin{aligned}W_y &= 2.45 \text{ cm}^3 \\W_z &= 5.42 \text{ cm}^3 \\I_y &= 4.33 \text{ cm}^4 \\I_z &= 13.54 \text{ cm}^4\end{aligned}$$



ACCESSORIES

SKS H, HS22,

