


A 4

profile rail 48x26 mm, not perforated

profile rail 48x26x2.50 mm, without perforation, slot size 22 mm

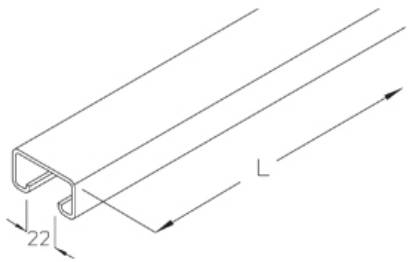

Bright rolled


Артикул	Product	height	width	length	t	weight
A 4-30B	26 mm	48 mm	3000 mm	2.50 mm	6.70 kg	
A 4-60B	26 mm	48 mm	6000 mm	2.50 mm	13.40 kg	


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	weight
A 4-30F	26 mm	48 mm	3000 mm	2.50 mm	7.20 kg	
A 4-60F	26 mm	48 mm	6000 mm	2.50 mm	14.40 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

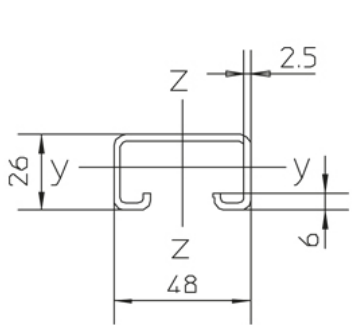


$$\begin{aligned}W_y &= 1.76 \text{ cm}^3 \\W_z &= 3.85 \text{ cm}^3 \\I_y &= 2.64 \text{ cm}^4 \\I_z &= 9.23 \text{ cm}^4\end{aligned}$$


$$\begin{aligned}W_y &= 1.76 \text{ cm}^3 \\W_z &= 3.85 \text{ cm}^3 \\I_y &= 2.64 \text{ cm}^4 \\I_z &= 9.23 \text{ cm}^4\end{aligned}$$



ACCESSORIES

HS22,

