


A 8

profile rail 40x22 mm, not perforated

profile rail 40x22x2.00 mm, without perforation, slot size 18 mm

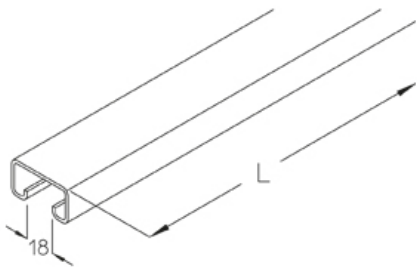

Bright rolled


Артикул	Product	height	width	length	t	weight
A 8-30B	22 mm	40 mm	3000 mm	2.00 mm	4.60 kg	
A 8-60B	22 mm	40 mm	6000 mm	2.00 mm	9.20 kg	


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	weight
A 8-30F	22 mm	40 mm	3000 mm	2.00 mm	5 kg	
A 8-60F	22 mm	40 mm	6000 mm	2.00 mm	9.90 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS




$$\begin{aligned}W_y &= 1.10 \text{ cm}^3 \\W_z &= 2.25 \text{ cm}^3 \\I_y &= 1.34 \text{ cm}^4 \\I_z &= 4.32 \text{ cm}^4\end{aligned}$$


$$\begin{aligned}W_y &= 1.10 \text{ cm}^3 \\W_z &= 2.25 \text{ cm}^3 \\I_y &= 1.34 \text{ cm}^4 \\I_z &= 4.32 \text{ cm}^4\end{aligned}$$



ACCESSORIES

SAI 21, SA 1, HS18, AM18, AMF18,

