


A 9

profile rail 40x25 mm, not perforated

profile rail 40x25x2.75 mm, without perforation, slot size 18 mm

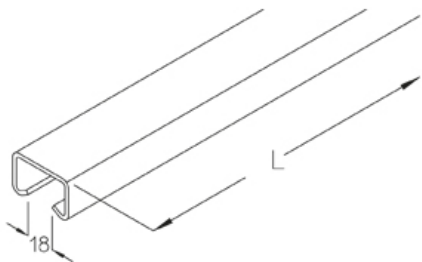

Bright rolled



Артикул	Product	height	width	length	t	weight
A 9-30B	25 mm	39.50 mm	3000 mm	2.75 mm	5.50 kg	
A 9-60B	25 mm	39.50 mm	6000 mm	2.75 mm	11 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	weight
A 9-30F	25 mm	39.50 mm	3000 mm	2.75 mm	5.90 kg	
A 9-60F	25 mm	39.50 mm	6000 mm	2.75 mm	11.80 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS



$$\begin{aligned}W_y &= 1.33 \text{ cm}^3 \\W_z &= 2.86 \text{ cm}^3 \\I_y &= 1.97 \text{ cm}^4 \\I_z &= 5.65 \text{ cm}^4\end{aligned}$$



$$\begin{aligned}W_y &= 1.33 \text{ cm}^3 \\W_z &= 2.86 \text{ cm}^3 \\I_y &= 1.97 \text{ cm}^4 \\I_z &= 5.65 \text{ cm}^4\end{aligned}$$



ACCESSORIES

AMA18, HS18,

