


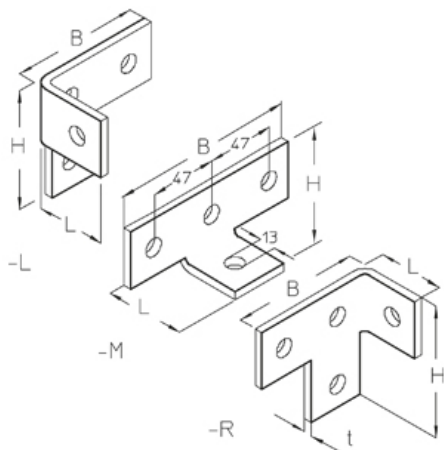

AVAW

rail connector angle

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
AVAW-L F	90 mm	98 mm	48 mm	6.00 mm	0.36 kg	
AVAW-M F	51 mm	136 mm	52 mm	6.00 mm	0.36 kg	
AVAW-R F	90 mm	98 mm	48 mm	6.00 mm	0.36 kg	

Product: Product

height: height


width: width

length: length

t: material thickness

weight: weight

DETAILS / APPLICATIONS

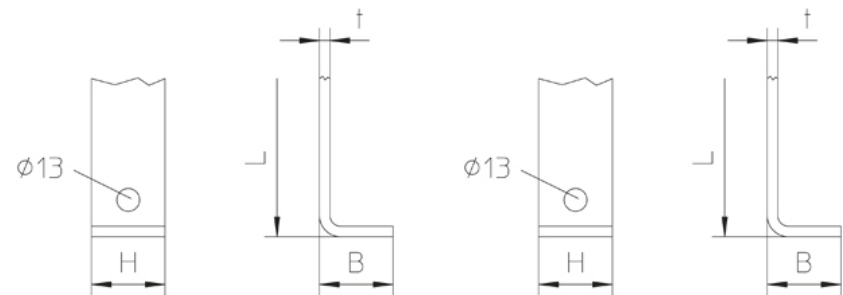

ACCESSORIES

AM22, AMF22, SES,

