


AVL

rail connector

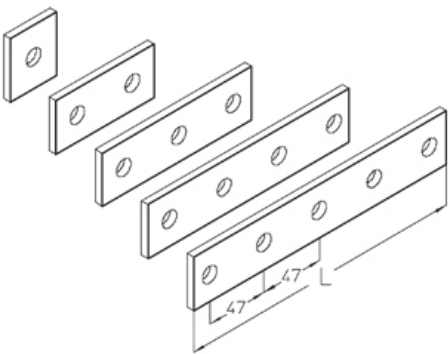


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	t	weight
AVL-1F	40 mm	42 mm	6.00 mm	0.08 kg	
AVL-2F	40 mm	89 mm	6.00 mm	0.17 kg	
AVL-3F	40 mm	136 mm	6.00 mm	0.25 kg	
AVL-4F	40 mm	183 mm	6.00 mm	0.34 kg	
AVL-5F	40 mm	230 mm	6.00 mm	0.43 kg	

Product: Product
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

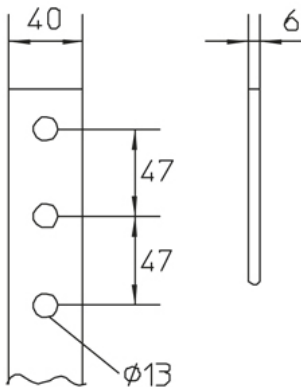

ACCESSORIES

AM22, AMF22, SES,

