


В 3

profile rail 28x12 mm, not perforated

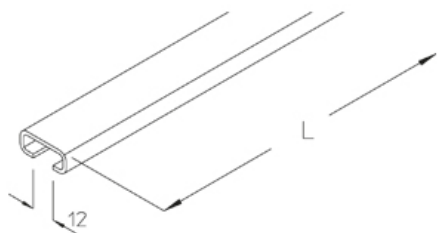

profile rail 28x12x2,00 mm, without perforation, slot size 12 mm

Bright rolled

Артикул	Product	height	width	length	t	weight
B 3-30B	12 mm	28 mm	3000 mm	2.00 mm	2.50 kg	
B 3-60B	12 mm	28 mm	6000 mm	2.00 mm	5 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)



Артикул	Product	height	width	length	t	weight
B 3-30F	12 mm	28 mm	3000 mm	2.00 mm	2.70 kg	
B 3-60F	12 mm	28 mm	6000 mm	2.00 mm	5.30 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11


Артикул	Product	height	width	length	t	weight
B 3-30E4	12 mm	28 mm	3000 mm	2.00 mm	2.50 kg	
B 3-60E4	12 mm	28 mm	6000 mm	2.00 mm	5 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

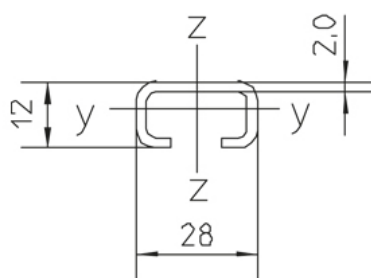

$$\begin{aligned} W_y &= 0.29 \text{ cm}^3 \\ W_z &= 0.80 \text{ cm}^3 \\ I_y &= 0.21 \text{ cm}^4 \\ I_z &= 1.12 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 0.29 \text{ cm}^3 \\ W_z &= 0.80 \text{ cm}^3 \\ I_y &= 0.21 \text{ cm}^4 \\ I_z &= 1.12 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

AM12, HS12,

