


B 6

profile rail 28x15 mm, not perforated

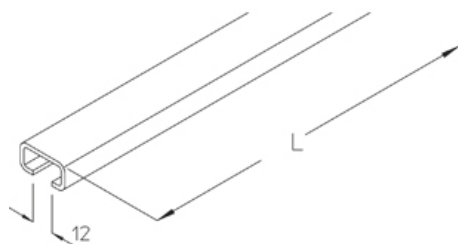

profile rail 28x15x2.30 mm, without perforation, slot size 12 mm

Bright rolled

Артикул	Product	height	width	length	t	weight
B 6-30B	15 mm	28 mm	3000 mm	2.30 mm	3.10 kg	
B 6-60B	15 mm	28 mm	6000 mm	2.30 mm	6.30 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
B 6-30F	15 mm	28 mm	3000 mm	2.30 mm	3.40 kg	
B 6-60F	15 mm	28 mm	6000 mm	2.30 mm	6.70 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	weight
B 6-30E	15 mm	28 mm	3000 mm	2.30 mm	3.10 kg	
B 6-60E	15 mm	28 mm	6000 mm	2.30 mm	6.30 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	t	weight
B 6-30E4	15 mm	28 mm	3000 mm	2.30 mm	3.40 kg	
B 6-60E4	15 mm	28 mm	6000 mm	2.30 mm	6.30 kg	

Product: Product

height: height



width: width

length: length


t: material thickness

weight: weight

DETAILS / APPLICATIONS

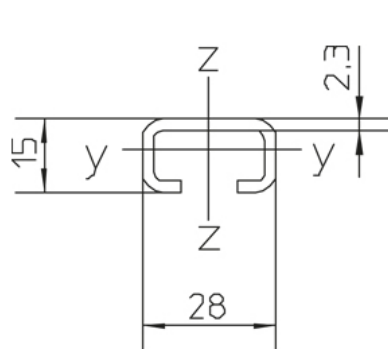

$$\begin{aligned} W_y &= 0.46 \text{ cm}^3 \\ W_z &= 1.05 \text{ cm}^3 \\ I_y &= 0.41 \text{ cm}^4 \\ I_z &= 1.47 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 0.46 \text{ cm}^3 \\ W_z &= 1.05 \text{ cm}^3 \\ I_y &= 0.41 \text{ cm}^4 \\ I_z &= 1.47 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

AM12, HS12,

