


B 7

Profile rail 30x15 mm, not perforated

profile rail 30x15x1.50 mm, without perforation, slot size 16 mm

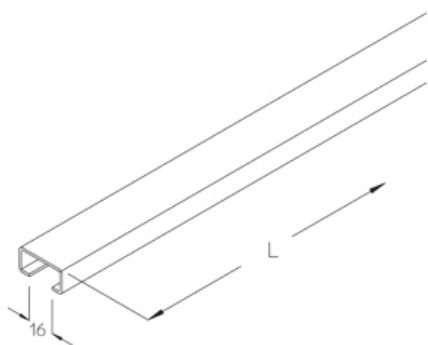

Bright rolled

Артикул	Product	height	width	length	t	weight
B 7-30B	15 mm	30 mm	3000 mm	1.50 mm	2.20 kg	
B 7-60B	15 mm	30 mm	6000 mm	1.50 mm	4.40 kg	

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight
B 7-30S	15 mm	30 mm	3000 mm	1.50 mm	2.30 kg	
B 7-60S	15 mm	30 mm	6000 mm	1.50 mm	4.50 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)



Артикул	Product	height	width	length	t	weight
B 7-30F	15 mm	30 mm	3000 mm	1.50 mm	2.40 kg	
B 7-60F	15 mm	30 mm	6000 mm	1.50 mm	4.80 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3


Артикул	Product	height	width	length	t	weight
B 7-30E	15 mm	30 mm	3000 mm	1.50 mm	2.20 kg	
B 7-60E	15 mm	30 mm	6000 mm	1.50 mm	4.40 kg	

Product: Product**height:** height**width:** width**length:** length**t:** material thickness**weight:** weight

DETAILS / APPLICATIONS



$$\begin{aligned} W_y &= 0.32 \text{ cm}^3 \\ W_z &= 0.83 \text{ cm}^3 \\ I_y &= 0.30 \text{ cm}^4 \\ I_z &= 1.26 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 0.32 \text{ cm}^3 \\ W_z &= 0.83 \text{ cm}^3 \\ I_y &= 0.30 \text{ cm}^4 \\ I_z &= 1.26 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

AM16, HS16,

