


KHA 2

profile rail 50x31 mm, perforated

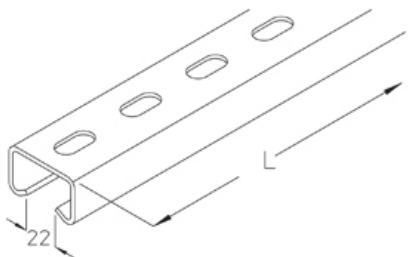

profile rail 50x31x3.25 mm, with continuous perforation 13x26, slot size 22 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
KHA 2-05F	31 mm	50 mm	500 mm	3.25 mm	1.50 kg	
KHA 2-10F	31 mm	50 mm	1000 mm	3.25 mm	3 kg	
KHA 2-15F	31 mm	50 mm	1500 mm	3.25 mm	4.50 kg	
KHA 2-20F	31 mm	50 mm	2000 mm	3.25 mm	6 kg	
KHA 2-30F	31 mm	50 mm	3000 mm	3.25 mm	9 kg	
KHA 2-60F	31 mm	50 mm	6000 mm	3.25 mm	17.90 kg	

Product: Product

height: height



width: width

length: length


t: material thickness

weight: weight

DETAILS / APPLICATIONS

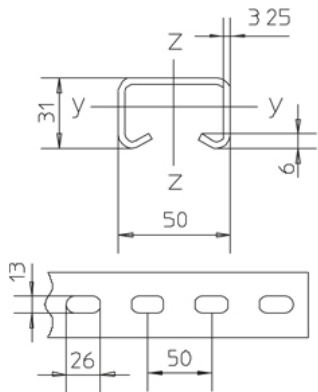

$$\begin{aligned}W_y &= 2.31 \text{ cm}^3 \\W_z &= 5.40 \text{ cm}^3 \\I_y &= 3.77 \text{ cm}^4 \\I_z &= 13.49 \text{ cm}^4\end{aligned}$$



$$\begin{aligned}W_y &= 2.31 \text{ cm}^3 \\W_z &= 5.40 \text{ cm}^3 \\I_y &= 3.77 \text{ cm}^4 \\I_z &= 13.49 \text{ cm}^4\end{aligned}$$



ACCESSORIES

SKS H, HS22,

