


KHA 21

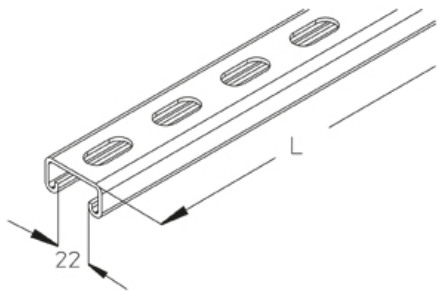

profile rail 41x21 mm, perforated

profile rail 41x21x2.50 mm, with continuous perforation 14x30, slot size 22 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)




Артикул	Product	height	width	length	t	weight
KHA 21-30F	21 mm	41 mm	3000 mm	2.50 mm	5.32 kg	
KHA 21-60F	21 mm	41 mm	6000 mm	2.50 mm	10.64 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11


Артикул	Product	height	width	length	t	weight
KHA 21-30E4	21 mm	41 mm	3000 mm	2.50 mm	4.97 kg	
KHA 21-60E4	21 mm	41 mm	6000 mm	2.50 mm	9.94 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS



$$\begin{aligned}W_y &= 0.92 \text{ cm}^3 \\W_z &= 2.56 \text{ cm}^3 \\I_y &= 1.02 \text{ cm}^4 \\I_z &= 5.25 \text{ cm}^4\end{aligned}$$



$$\begin{aligned}W_y &= 0.92 \text{ cm}^3 \\W_z &= 2.56 \text{ cm}^3 \\I_y &= 1.02 \text{ cm}^4 \\I_z &= 5.25 \text{ cm}^4\end{aligned}$$



ACCESSORIES

SAI 21, RUS 41, AM22, SA 1,

