




KHA 4

profile rail 48x26 mm, perforated

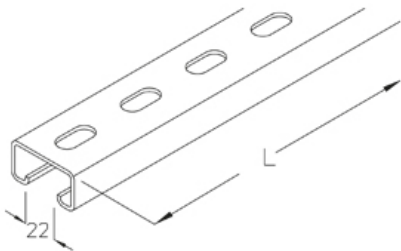



profile rail 48x26x2.50 mm, with continuous perforation 13x26, slot size 22 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	weight
KHA 4-30F	26 mm	48 mm	3000 mm	2.50 mm	6.80 kg	
KHA 4-60F	26 mm	48 mm	6000 mm	2.50 mm	13.60 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

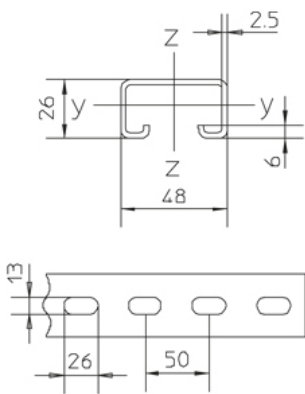

$$\begin{aligned} W_y &= 1.66 \text{ cm}^3 \\ W_z &= 3.83 \text{ cm}^3 \\ I_y &= 2.29 \text{ cm}^4 \\ I_z &= 9.18 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 1.66 \text{ cm}^3 \\ W_z &= 3.83 \text{ cm}^3 \\ I_y &= 2.29 \text{ cm}^4 \\ I_z &= 9.18 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

HS22,