


KHA 82

profile rail 41x82 mm, perforated

profile rail 41x82x2.50 mm, with continuous perforation 14x30, welded back to back, slot size 22 mm

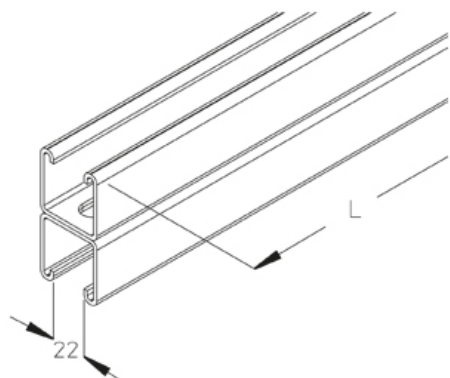

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
KHA 82-30F	82 mm	41 mm	3000 mm	2.50 mm	15.68 kg	
KHA 82-60F	82 mm	41 mm	6000 mm	2.50 mm	31.36 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3



Артикул	Product	height	width	length	t	weight
KHA 82-30E	82 mm	41 mm	3000 mm	2.50 mm	14.87 kg	
KHA 82-60E	82 mm	41 mm	6000 mm	2.50 mm	29.74 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11


Артикул	Product	height	width	length	t	weight
KHA 82-30E4	82 mm	41 mm	3000 mm	2.50 mm	15.05 kg	
KHA 82-60E4	82 mm	41 mm	6000 mm	2.50 mm	30.10 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

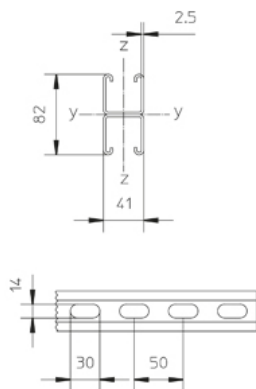

$$\begin{aligned}W_y &= 8.64 \text{ cm}^3 \\W_z &= 8.76 \text{ cm}^3 \\I_y &= 35.41 \text{ cm}^4 \\I_z &= 17.95 \text{ cm}^4\end{aligned}$$



$$\begin{aligned}W_y &= 8.64 \text{ cm}^3 \\W_z &= 8.76 \text{ cm}^3 \\I_y &= 35.41 \text{ cm}^4 \\I_z &= 17.95 \text{ cm}^4\end{aligned}$$

ACCESSORIES

SAI 41, RUS 41, AM22, AMF22,

