


KHA 9

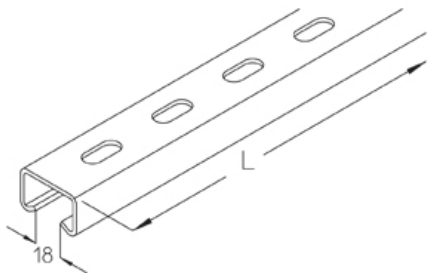

profile rail 40x25 mm, perforated




profile rail 40x25x2.75 mm, with continuous perforation 11x24, slot size 18 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	weight
KHA 9-02F	25 mm	39.50 mm	200 mm	2.75 mm	0.40 kg	
KHA 9-03F	25 mm	39.50 mm	300 mm	2.75 mm	0.60 kg	
KHA 9-04F	25 mm	39.50 mm	400 mm	2.75 mm	0.80 kg	
KHA 9-05F	25 mm	39.50 mm	500 mm	2.75 mm	0.90 kg	
KHA 9-06F	25 mm	39.50 mm	600 mm	2.75 mm	1.20 kg	
KHA 9-07F	25 mm	39.50 mm	700 mm	2.75 mm	1.40 kg	
KHA 9-08F	25 mm	39.50 mm	800 mm	2.75 mm	1.60 kg	
KHA 9-09F	25 mm	39.50 mm	900 mm	2.75 mm	1.80 kg	
KHA 9-10F	25 mm	39.50 mm	1000 mm	2.75 mm	1.90 kg	
KHA 9-11F	25 mm	39.50 mm	1100 mm	2.75 mm	2.10 kg	
KHA 9-12F	25 mm	39.50 mm	1200 mm	2.75 mm	2.30 kg	
KHA 9-13F	25 mm	39.50 mm	1300 mm	2.75 mm	2.40 kg	
KHA 9-14F	25 mm	39.50 mm	1400 mm	2.75 mm	2.60 kg	
KHA 9-15F	25 mm	39.50 mm	1500 mm	2.75 mm	2.80 kg	
KHA 9-20F	25 mm	39.50 mm	2000 mm	2.75 mm	3.70 kg	
KHA 9-30F	25 mm	39.50 mm	3000 mm	2.75 mm	5.60 kg	
KHA 9-60F	25 mm	39.50 mm	6000 mm	2.75 mm	11.20 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
weight: weight

DETAILS / APPLICATIONS

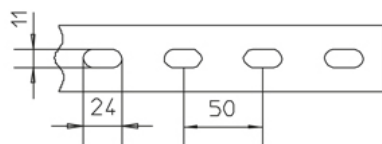

$$\begin{aligned} W_y &= 1.25 \text{ cm}^3 \\ W_z &= 2.85 \text{ cm}^3 \\ I_y &= 1.70 \text{ cm}^4 \\ I_z &= 5.62 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 1.25 \text{ cm}^3 \\ W_z &= 2.85 \text{ cm}^3 \\ I_y &= 1.70 \text{ cm}^4 \\ I_z &= 5.62 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

AMA18, HS18,

