


KHB 7

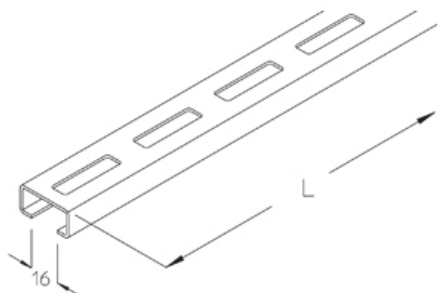

profile rail 30x15 mm, perforated

profile rail 30x15x1.50 mm, with continuous perforation 9x35, slot size 16 mm

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight
KHB 7-30S	15 mm	30 mm	3000 mm	1.50 mm	2.10 kg	
KHB 7-60S	15 mm	30 mm	6000 mm	1.50 mm	4.20 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
KHB 7-30F	15 mm	30 mm	3000 mm	1.50 mm	2.30 kg	
KHB 7-60F	15 mm	30 mm	6000 mm	1.50 mm	4.60 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	weight
KHB 7-20E	15 mm	30 mm	2000 mm	1.50 mm	1.34 kg	
KHB 7-30E	15 mm	30 mm	3000 mm	1.50 mm	2.20 kg	
KHB 7-60E	15 mm	30 mm	6000 mm	1.50 mm	4.40 kg	

Product: Product

height: height




width: width

length: length


t: material thickness

weight: weight

DETAILS / APPLICATIONS

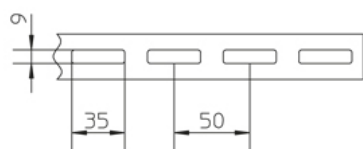

$$\begin{aligned} W_y &= 0.30 \text{ cm}^3 \\ W_z &= 0.83 \text{ cm}^3 \\ I_y &= 0.25 \text{ cm}^4 \\ I_z &= 1.25 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 0.30 \text{ cm}^3 \\ W_z &= 0.83 \text{ cm}^3 \\ I_y &= 0.25 \text{ cm}^4 \\ I_z &= 1.25 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

AM16, HS16,

